

# 2026

## ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

Historical Record: 07/24/2026  
External Version



|                             |      |
|-----------------------------|------|
| GENERAL INFORMATION         | 5000 |
| OVERHEAD LAYOUT SYSTEMS     | 5100 |
| UNDERGROUND LAYOUT SYSTEMS  | 5200 |
| DEMAND ESTIMATING           | 5300 |
| VOLTAGE DROP                | 5400 |
| CONDUCTOR AMPACITIES        | 5500 |
| TRANSFORMERS                | 5600 |
| PADS & SUBSTRUCTURES        | 5700 |
| CAPACITORS                  | 5800 |
| WIRE & SUPPORTS             | 5900 |
| SUBSTATION LOAD FORECASTING | 6000 |
| SECTIONALIZING & PROTECTION | 6100 |
| SYSTEM ENGINEERING          | 6200 |
| SUBSTATION ENGINEERING      | 6300 |
| INTRODUCTION                |      |
| DISCLAIMER & CONTACTS       |      |
| SUMMARY OF CHANGES          |      |

SET UP "SYNC" BY CLICKING [HERE](#)

THIS WILL DOWNLOAD THE MANUALS IN THE BACKGROUND, WHICH WILL ENABLE YOU TO EASILY OPEN THE MANUAL IN THE APPROVED PROGRAMS: ADOBE READER OR BLUEBEAM.



## **ATTENTION:**

- The contents held within this book are for field maintenance only. Every effort should be made, when possible, to upgrade to current standards.

IF YOU HAVE ANY QUESTIONS REGARDING THE CONTENT OF THESE MANUALS, PLEASE EMAIL  
[CONSTRUCTIONSTANDARDSADMINISTRATORS@SEMPRAUTILITIES.COM](mailto:CONSTRUCTIONSTANDARDSADMINISTRATORS@SEMPRAUTILITIES.COM) OR CONTACT:

| MANUAL                                      | CONTACT         | EMAIL ADDRESS                                                  | PHONE          |
|---------------------------------------------|-----------------|----------------------------------------------------------------|----------------|
| Electric Distribution Design Manual         | Fidel Castro    | <a href="mailto:FRCastro@sdge.com">FRCastro@sdge.com</a>       | (858) 654-1607 |
| Overhead Construction Standards             | Mike Forchette  | <a href="mailto:mforchette@sdge.com">mforchette@sdge.com</a>   | (619) 244-7495 |
| Service Standards & Guide                   | Jennifer Mann   | <a href="mailto:jmann@sdge.com">jmann@sdge.com</a>             | (619) 676-1680 |
| Electric Vehicle Supply Equipment Standards | Jennifer Mann   | <a href="mailto:jmann@sdge.com">jmann@sdge.com</a>             | (619) 676-1680 |
| Underground Construction Standards          | Eddie Alcobia   | <a href="mailto:ealcobia@sdge.com">ealcobia@sdge.com</a>       | (619) 574-4988 |
| Electric Standard Practices                 | Joey Kucharyski | <a href="mailto:jkucharyski@sdge.com">jkucharyski@sdge.com</a> | (760) 566-5919 |
| Tool Catalog                                | Roy Guilao      | <a href="mailto:rguilao@sdge.com">rguilao@sdge.com</a>         | (760) 672-6211 |



## SUMMARY OF CHANGES

[illegible]



**5000  
GENERAL  
INFORMATION**

**5000  
GENERAL  
INFORMATION**

5000 - No FMO standards for this section.



**5100**  
**OVERHEAD LAYOUT**  
**SYSTEMS**

**5100**  
**OVERHEAD LAYOUT**  
**SYSTEMS**

5100 - No FMO standards for this section.



**5200**  
**UNDERGROUND**  
**LAYOUT SYSTEMS**

**5200**  
**UNDERGROUND**  
**LAYOUT SYSTEMS**

**SUBJECT**

5223

## SINGLE FAMILY RESIDENTIAL SECONDARY SYSTEMS

| © 1998 - 2025 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law. |                |                                                                  |                           |     |     |            |                    |        |    |    |          |     |      |                     |  |               |
|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------------------------------------------------------------|---------------------------|-----|-----|------------|--------------------|--------|----|----|----------|-----|------|---------------------|--|---------------|
| REV                                                                                                                                                  | CHANGE         | DR                                                               | BY                        | DSN | APV | DATE       | REV                | CHANGE | DR | BY | DSN      | APV | DATE |                     |  |               |
| C                                                                                                                                                    |                |                                                                  |                           |     |     |            | F                  |        |    |    |          |     |      |                     |  |               |
| B                                                                                                                                                    |                |                                                                  |                           |     |     |            | E                  |        |    |    |          |     |      |                     |  |               |
| A                                                                                                                                                    | ORIGINAL ISSUE | JKI                                                              | KNM                       | FRC | KRG | 02/13/2025 | D                  |        |    |    |          |     |      |                     |  |               |
| SHEET<br>1 OF 1                                                                                                                                      |                |                                                                  | Indicates Latest Revision |     |     |            | Completely Revised |        |    | X  | New Page |     |      | Information Removed |  | FMO<br>DM5201 |
|                                                                                                                                                      |                | SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY |                           |     |     |            |                    |        |    |    |          |     |      |                     |  |               |
|                                                                                                                                                      |                | TABLE OF CONTENTS<br>UNDERGROUND LAYOUT SYSTEMS                  |                           |     |     |            |                    |        |    |    |          |     |      |                     |  |               |



**DM5223 FIELD MAINTENANCE ONLY**

ALL VERSIONS LISTED IN FMO ARE SUPERSEDED BY THEIR CURRENT VERSION FOUND INSIDE THE ELECTRIC DISTRIBUTION DESIGN MANUAL.

**REVISION HISTORY:**

**02/21/2025: DM5223 MOVED TO FMO**

© 1998 - 2025 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV             | CHANGE            | DR                                                               | BY                        | DSN | APV | DATE       | REV                | CHANGE | DR | BY | DSN      | APV | DATE |                     |  |               |
|-----------------|-------------------|------------------------------------------------------------------|---------------------------|-----|-----|------------|--------------------|--------|----|----|----------|-----|------|---------------------|--|---------------|
| C               |                   |                                                                  |                           |     |     |            | F                  |        |    |    |          |     |      |                     |  |               |
| B               |                   |                                                                  |                           |     |     |            | E                  |        |    |    |          |     |      |                     |  |               |
| A               | 6114 MOVED TO FMO | JKI                                                              | KNM                       | FRC | KRG | 02/13/2025 | D                  |        |    |    |          |     |      |                     |  |               |
| SHEET<br>1 OF 1 |                   |                                                                  | Indicates Latest Revision |     |     |            | Completely Revised |        |    | X  | New Page |     |      | Information Removed |  | FMO<br>DM5223 |
|                 |                   | SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY |                           |     |     |            |                    |        |    |    |          |     |      |                     |  |               |
|                 |                   | SINGLE FAMILY RESIDENTIAL SECONDARY SYSTEMS                      |                           |     |     |            |                    |        |    |    |          |     |      |                     |  |               |

This design standard provides the residential secondary and service system optimum array tables used in conjunction with the General Design Criteria provided in Design Manual 5222. These tables represent an economic analysis of secondary and service system design alternatives, on a cost per lot basis, for approximately 9600 different array possibilities.

The optimum array tables shall be used for residential single-family subdivision design to insure the lowest cost system is installed.

NONE

A. The optimum array tables provide the optimum array configuration, transformer size and secondary/service cable selections based on KW demand, secondary distance, and service distance. The instructions for properly applying the optimum array tables are as follows:

- Determine the KW demand per lot for the subdivision from the Residential Demand Estimating Criteria, Design Manual 5322.

- The secondary footage and structure (Transformer Pad or Handhole) placement is dictated by the lot front footage, street width, and meter location. Typically, the structures will be placed at the load center to serve as many meters as possible from one location. This requires the secondary footage to span from one to four lots or the street width. Therefore, the secondary footage is determined by:

- a. Measuring the distance across the number of lots being spanned or the distance across the street
- b. Adding footage to the overall distance for cable tools (Design Manual 5922). The typical secondary footage for a subdivision should be determined by measuring several lot combinations and using the most common footage(s) as a benchmark for optimum array selections.

- The service distance for a single-sided array service or double-sided array short service is equal to the service panel setback. The double-sided array long service is equal to the service panel setback plus the distance from the originating structure across the street to the property line. The service panel setback is either an estimated or measured distance from behind the sidewalk at the property line to the service panel location. Additional footage shall be added to this distance from the service cable tails (Design Manual 5922).

- Select the subdivision single-sided and/or double-sided optimum array configuration from the table with the appropriate KW demand, secondary and service lengths. The optimum array selection for the subdivision may be used for each individual array whose secondary and service footage does not differ from the typical by more than ten feet. Otherwise, an individual array selection must be made.


© 1998-2020 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV             | CHANGE         | BY                                                               | DSGN | APPV               | DATE       | REV      | CHANGE | BY                  | DSGN | APPV            | DATE |
|-----------------|----------------|------------------------------------------------------------------|------|--------------------|------------|----------|--------|---------------------|------|-----------------|------|
| C               |                |                                                                  |      |                    |            | F        |        |                     |      |                 |      |
| B               | FORMATTING     | JJK                                                              | -    | -                  | 02/21/2020 | E        |        |                     |      |                 |      |
| A               | ORIGINAL ISSUE | -                                                                | CVN  | RDG                | 01/01/1987 | D        |        |                     |      |                 |      |
| SHEET<br>1 OF 7 |                | X Indicates Latest Revision                                      |      | Completely Revised |            | New Page |        | Information Removed |      | FMO<br>DM5223.1 |      |
|                 |                | SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY |      |                    |            |          |        |                     |      |                 |      |
|                 |                | <b>SINGLE FAMILY RESIDENTIAL<br/>SECONDARY SYSTEMS</b>           |      |                    |            |          |        |                     |      |                 |      |


| REV | CHANGE         | BY | DSGN | APPV | DATE       | REV | CHANGE | BY | DSGN | APPV | DATE |
|-----|----------------|----|------|------|------------|-----|--------|----|------|------|------|
| C   |                |    |      |      |            | F   |        |    |      |      |      |
| B   | FORMATTING     | JK | -    | -    | 02/21/2020 | E   |        |    |      |      |      |
| A   | ORIGINAL ISSUE | -  | CVN  | RDG  | 01/01/1987 | D   |        |    |      |      |      |

|                 |                                                                                                               |                    |          |                     |                 |
|-----------------|---------------------------------------------------------------------------------------------------------------|--------------------|----------|---------------------|-----------------|
| SHEET<br>2 OF 7 |  Indicates Latest Revision | Completely Revised | New Page | Information Removed | FMO<br>DM5223.2 |
|                 | SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY                                              |                    |          |                     |                 |
|                 | <p align="center"><b>SINGLE FAMILY RESIDENTIAL<br/>SECONDARY SYSTEMS</b></p>                                  |                    |          |                     |                 |

2. From the optimum array table on Design Manual 5223.4, the double-sided optimum array for this combination serves eight customers with a 25 KVA as shown below.

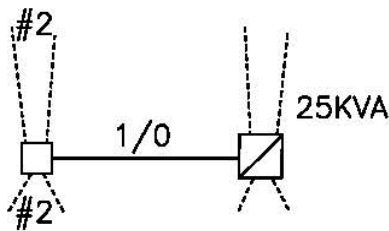

3. The resulting combination optimum array serves ten customers, 4 double-sided (140' secondary) and six single-sided (60' secondaries). The transformer loading for ten customers is 36 KW. Therefore, a 50 KVA transformer is selected.

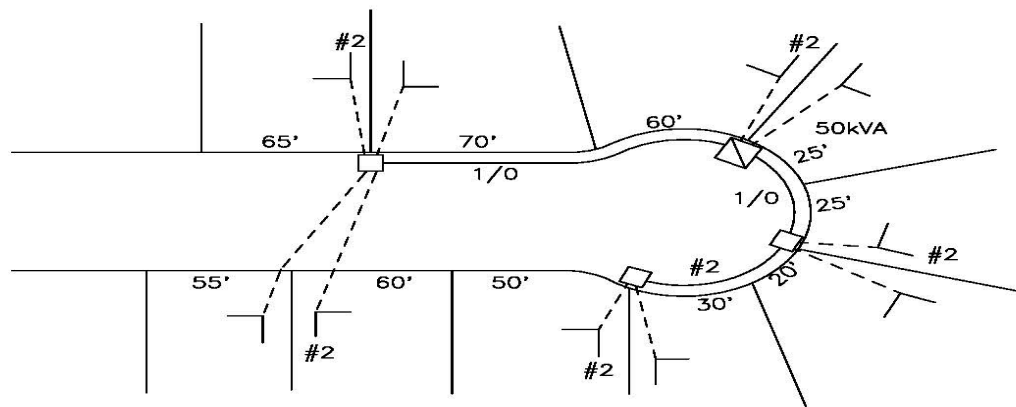

- A. Design Manual 5223 – Residential Distribution System Design
- B. Design Manual 5712 – Secondary Handhole Elimination
- C. Design Manual 5411 – Voltage Drop & Flicker Application Guidelines
- D. Study – “Reduced Secondary and Service System Cost Through Optimum Single-Family Residential Design”, May 1985
- E. Design Manual 5922 – Cable Tail Length Requirements
- F. Design Manual 5322 – Residential Demand Estimating

| REV | CHANGE         | BY | DSGN | APPV | DATE       | REV | CHANGE | BY | DSGN | APPV | DATE |
|-----|----------------|----|------|------|------------|-----|--------|----|------|------|------|
| C   |                |    |      |      |            | F   |        |    |      |      |      |
| B   | FORMATTING     | JK | -    | -    | 02/21/2020 | E   |        |    |      |      |      |
| A   | ORIGINAL ISSUE | -  | CVN  | RDG  | 01/01/1987 | D   |        |    |      |      |      |


|                 |                                                                                                                                                 |                 |                                                                   |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------------------------------------------------------|
| SHEET<br>3 OF 7 | <div> <div>X</div> <div>Indicates Latest Revision</div> </div> <div>Completely Revised</div> <div>New Page</div> <div>Information Removed</div> | FMO<br>DM5223.3 |                                                                   |
|                 |                                                                                                                                                 |                 | SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY  |
|                 |                                                                                                                                                 |                 | <div>SINGLE FAMILY RESIDENTIAL</div> <div>SECONDARY SYSTEMS</div> |



| REV | CHANGE         | BY  | DSGN | APPV | DATE       | REV | CHANGE | BY | DSGN | APPV | DATE |
|-----|----------------|-----|------|------|------------|-----|--------|----|------|------|------|
| C   |                |     |      |      |            | F   |        |    |      |      |      |
| B   | FORMATTING     | JIK | -    | -    | 02/21/2020 | E   |        |    |      |      |      |
| A   | ORIGINAL ISSUE | -   | CVN  | RDG  | 01/01/1987 | D   |        |    |      |      |      |

|                 |                                                                                                               |                    |          |                     |                 |
|-----------------|---------------------------------------------------------------------------------------------------------------|--------------------|----------|---------------------|-----------------|
| SHEET<br>5 OF 7 |  Indicates Latest Revision | Completely Revised | New Page | Information Removed | FMO<br>DM5223.5 |
|                 | SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY                                              |                    |          |                     |                 |
|                 | SINGLE FAMILY RESIDENTIAL<br>SECONDARY SYSTEMS                                                                |                    |          |                     |                 |





Sq. Ft.: 2000-2999

**SINGLE-SIDED**

DOUBLE-SIDED

DOUBLE-SIDED

DOUBLE-SIDED

| 6.5kW EH & EWH |         |         |        | 6kW A/C & EWH |         |         |          | 7.5kW EH & EWH |         |         |          | 7kW A/C & EWH |         |         |          | 8kW EH & EWH |         |         |          | 8kW A/C & EWH |         |         |        |       |
|----------------|---------|---------|--------|---------------|---------|---------|----------|----------------|---------|---------|----------|---------------|---------|---------|----------|--------------|---------|---------|----------|---------------|---------|---------|--------|-------|
| Sec            | Fr      | Serv    | # Cust | Sec           | Fr      | Serv    | # Cust   | Sec            | Fr      | Serv    | # Cust   | Sec           | Fr      | Serv    | # Cust   | Sec          | Fr      | Serv    | # Cust   | Sec           | Fr      | Serv    | # Cust |       |
| 75kVA          |         |         |        | 75kVA         |         |         |          | 75kVA          |         |         |          | 100kVA        |         |         |          | 75kVA        |         |         |          | 75kVA         |         |         |        |       |
| 60             | 80-90   | 3/0-3/0 | 20     | 60            | 80-100  | 3/0-3/0 | 16(g)(j) | 60             | 80      | 100     | 3/0-3/0  | 60            | 150     | 350-3/0 | 16(x)(y) | 60           | 80-100  | 3/0-3/0 | 16(g)(j) | 60            | 80      | 80      | 3/0    | 12    |
| 60             | 100-150 | 3/0-3/0 | 20(e)  | 60            | 110-150 | 3/0-3/0 | 16(g)    | 60             | 100-120 | 3/0-3/0 | 16(g)(j) | 60            | 150     | 350-3/0 | 16(x)(y) | 60           | 110     | 3/0-3/0 | 16(g)(j) | 60            | 100-140 | 3/0     | 12(f)  |       |
| 70             | 80-100  | 3/0-3/0 | 20(e)  | 70            | 80-100  | 1/0     | 12       | 60             | 130-150 | 3/0-3/0 | 16(g)(j) | 70            | 150     | 350-350 | 16(x)(y) | 60           | 120-140 | 350-3/0 | 16(g)(j) | 60            | 150     | 350-3/0 | 20(e)  |       |
| 70             | 80-100  | 3/0-3/0 | 20(e)  | 70            | 110-150 | 350-3/0 | 16(g)(j) | 70             | 80      | 3/0-3/0 | 16(g)(j) | 70            | 75kVA   |         |          | 70           | 80      | 350-3/0 | 16(g)(j) | 70            | 80      | 3/0     | 12     |       |
| 70             | 110-150 | 1/0     | 12     | 80            | 80-90   | 1/0     | 12       | 70             | 80      | 350-3/0 | 16(g)    | 60            | 80-120  | 1/0     | 12(f)    | 70           | 80      | 350-3/0 | 16(g)(j) | 70            | 90-140  | 3/0     | 12(f)  |       |
| 80             | 90-110  | 1/0     | 12     | 80            | 100-130 | 350-3/0 | 16(g)(j) | 70             | 100-150 | 350-3/0 | 16(g)(j) | 60            | 130-140 | 3/0     | 12(f)    | 70           | 90-120  | 350-3/0 | 16(g)(j) | 70            | 150     | 3/0     | 12(f)  |       |
| 80             | 120-150 | 1/0     | 12(f)  | 80            | 140-150 | 3/0     | 12(f)    | 80             | 120-140 | 350-3/0 | 16(g)(j) | 70            | 80      | 3/0     | 12       | 70           | 130-140 | 350-3/0 | 16(g)(j) | 80            | 80      | 3/0     | 12     |       |
| 80             | 80-100  | 90      | 80     | 90            | 80-100  | 90      | 80       | 80             | 130-140 | 350-3/0 | 16(g)(j) | 70            | 80-140  | 3/0     | 12(f)    | 70           | 80      | 350-3/0 | 16(g)(j) | 80            | 90-130  | 3/0     | 12(f)  |       |
| 90             | 110-150 | 1/0     | 12(f)  | 90            | 100-150 | 1/0     | 12(f)    | 80             | 150     | 3/0     | 12(f)    | 80            | 90-130  | 3/0     | 12(f)    | 70           | 150     | 3/0     | 12(f)    | 80            | 140-150 | 3/0     | 12(f)  |       |
| 100            | 80      | 1/0     | 12     | 100           | 80      | 1/0     | 12       | 80             | 80-80   | 3/0     | 12       | 80            | 140     | 3/0     | 12(f)    | 80           | 80-100  | 3/0     | 12       | 80            | 80      | 3/0     | 12     |       |
| 100            | 80-150  | 1/0     | 12(f)  | 100           | 90-130  | 1/0     | 12       | 90             | 100     | 3/0     | 12(f)    | 80            | 80      | 3/0     | 12       | 80           | 110-150 | 3/0     | 12(f)    | 90            | 90-120  | 3/0     | 12(f)  |       |
| 110            | 80-110  | 70      | 12(f)  | 110           | 80-110  | 70      | 12(f)    | 90             | 110-150 | 3/0     | 12(f)    | 80            | 90-120  | 3/0     | 12       | 80           | 130-150 | 3/0     | 12(f)    | 90            | 130-150 | 3/0     | 12(f)  |       |
| 110            | 120-140 | 3/0     | 12     | 110           | 80-130  | 1/0     | 12(f)    | 90             | 100     | 3/0     | 12(f)    | 80            | 100-150 | 3/0     | 12(f)    | 90           | 100-140 | 3/0     | 12(f)    | 90            | 100     | 80-120  | 3/0    | 12(f) |
| 110            | 150     | 3/0     | 12(f)  | 110           | 140-150 | 3/0     | 12(f)    | 100            | 80      | 100     | 3/0      | 12(f)         | 80      | 90-120  | 3/0      | 12(f)        | 90      | 150     | 3/0      | 8(g)          | 100     | 130-150 | 3/0    | 12(f) |
| 120            | 80-110  | 3/0     | 12     | 120           | 80-110  | 1/0     | 12(f)    | 100            | 110-150 | 3/0     | 12(f)    | 100           | 80-120  | 3/0     | 12(f)    | 100          | 80      | 3/0     | 12       | 100           | 80      | 80-110  | 3/0    | 12(f) |
| 120            | 120-150 | 1/0     | 12(f)  | 120           | 120-150 | 3/0     | 12(f)    | 100            | 100-130 | 3/0     | 12(f)    | 100           | 130-150 | 3/0     | 12(f)    | 100          | 120-150 | 3/0     | 12(f)    | 100           | 120     | 120-150 | 3/0    | 12(f) |
| 130            | 80-110  | 3/0     | 12     | 130           | 120-150 | 3/0     | 12(f)    | 110            | 80-130  | 3/0     | 12(f)    | 100           | 150     | 3/0     | 12(f)    | 110          | 150     | 3/0     | 12(f)    | 110           | 80      | 80-100  | 3/0    | 12(f) |
| 130            | 120-150 | 3/0     | 12(f)  | 130           | 120-150 | 3/0     | 12(f)    | 110            | 140-150 | 3/0     | 8(g)     | 110           | 80-110  | 3/0     | 12(f)    | 110          | 80-110  | 3/0     | 12(f)    | 110           | 120     | 110-150 | 3/0    | 12(f) |
| 140            | 80-100  | 3/0     | 12     | 140           | 80-100  | 3/0     | 12       | 120            | 80-110  | 3/0     | 8(g)     | 110           | 120-150 | 3/0     | 12(f)    | 110          | 130-150 | 3/0     | 12(f)    | 120           | 130     | 80-100  | 3/0    | 12(f) |
| 140            | 100-150 | 3/0     | 12(f)  | 140           | 100-130 | 3/0     | 12(f)    | 120            | 120-150 | 3/0     | 8(g)     | 110           | 80-100  | 3/0     | 12(f)    | 110          | 80-100  | 3/0     | 12(f)    | 120           | 130     | 80-100  | 3/0    | 12(f) |
| 150            | 80-90   | 3/0     | 12     | 150           | 140-150 | 3/0     | 12(f)    | 130            | 80      | 3/0     | 12(f)    | 120           | 110-150 | 3/0     | 12(f)    | 120          | 80-90   | 3/0     | 12(f)    | 120           | 140     | 80-100  | 3/0    | 12(f) |
| 150            | 100-150 | 3/0     | 12(f)  | 150           | 80-100  | 3/0     | 12       | 130            | 90      | 3/0     | 12(f)    | 130           | 110-150 | 3/0     | 12(f)    | 120          | 100-130 | 3/0     | 12(f)    | 120           | 140     | 140     | 350    | 12(f) |
|                |         |         |        | 150           | 140-150 | 3/0     | 12(f)    | 130            | 100-130 | 3/0     | 8(g)     | 140           | 150     | 350     | 12(f)    | 120          | 110-140 | 3/0     | 12(f)    | 130           | 150     | 350     | 12(f)  |       |
|                |         |         |        | 150           | 80-90   | 3/0     | 12(f)    | 140            | 140-150 | 3/0     | 8(g)     | 140           | 80-90   | 3/0     | 12(f)    | 130          | 80      | 3/0     | 12(f)    | 130           | 150     | 350     | 12(f)  |       |
|                |         |         |        | 150           | 100-150 | 3/0     | 12(f)    | 140            | 80      | 3/0     | 12(f)    | 140           | 80-90   | 3/0     | 12(f)    | 130          | 80-120  | 3/0     | 12(f)    | 140           | 150     | 350     | 12(f)  |       |
|                |         |         |        | 150           | 140-150 | 3/0     | 12(f)    | 140            | 90-110  | 3/0     | 8(g)     | 140           | 100-140 | 3/0     | 12(f)    | 130          | 130-150 | 3/0     | 8(g)     | 140           | 150     | 350     | 12(f)  |       |
|                |         |         |        | 150           | 80-90   | 3/0     | 12(f)    | 140            | 120     | 3/0     | 12(f)    | 150           | 150     | 350     | 12(f)    | 140          | 80      | 3/0     | 12(f)    | 140           | 150     | 350     | 12(f)  |       |
|                |         |         |        | 150           | 100-150 | 3/0     | 12(f)    | 140            | 130-150 | 3/0     | 9(f)     | 150           | 100-140 | 3/0     | 12(f)    | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 140-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 80-90   | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 100-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 140-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 80-90   | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 100-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 140-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 80-90   | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 100-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 140-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 80-90   | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 100-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 140-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 80-90   | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 100-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 140-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 80-90   | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 100-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 140-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 80-90   | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 100-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 140-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 80-90   | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 100-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 140-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 80-90   | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 100-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 140-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 80-90   | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 100-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 140-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 80-90   | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 100-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 140-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 80-90   | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        | 150           | 100-150 | 3/0     | 12(f)    |                |         |         |          |               |         |         |          | 140          | 80-150  | 3/0     | 8(g)     | 150           | 140-150 | 350     | 12(f)  |       |
|                |         |         |        |               |         |         |          |                |         |         |          |               |         |         |          |              |         |         |          |               |         |         |        |       |

FMO  
DM5223.7

**5300  
DEMAND  
ESTIMATING**

**5300  
DEMAND  
ESTIMATING**

5300 - No FMO standards for this section.



5400

VOLTAGE DROP

**5400**  
**VOLTAGE DROP**






ALL VERSIONS LISTED IN FMO ARE SUPERSEDED BY THEIR CURRENT VERSION FOUND INSIDE THE ELECTRIC DISTRIBUTION DESIGN MANUAL.

**11/06 /2025:** MOVED TO FMO

| © 1998 - 2025 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law. |                   |                                                                  |                           |     |     |            |                    |        |    |    |          |     |      |                     |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------------------------------------------------------|---------------------------|-----|-----|------------|--------------------|--------|----|----|----------|-----|------|---------------------|--|
| REV                                                                                                                                                  | CHANGE            | DR                                                               | BY                        | DSN | APV | DATE       | REV                | CHANGE | DR | BY | DSN      | APV | DATE |                     |  |
| C                                                                                                                                                    |                   |                                                                  |                           |     |     |            | F                  |        |    |    |          |     |      |                     |  |
| B                                                                                                                                                    |                   |                                                                  |                           |     |     |            | E                  |        |    |    |          |     |      |                     |  |
| A                                                                                                                                                    | 5431 MOVED TO FMO | YZZ                                                              | FRC                       | FRC | FRC | 11/06/2025 | D                  |        |    |    |          |     |      |                     |  |
| SHEET<br>1 OF 1                                                                                                                                      |                   |                                                                  | Indicates Latest Revision |     |     |            | Completely Revised |        |    | X  | New Page |     |      | Information Removed |  |
|                                                                                                                                                      |                   | SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY |                           |     |     |            |                    |        |    |    |          |     |      |                     |  |
|                                                                                                                                                      |                   | UNDERGROUND VOLTAGE DROP AND FLICKER NOMOGRAPH                   |                           |     |     |            |                    |        |    |    |          |     |      |                     |  |
|                                                                                                                                                      |                   | FMO<br>DM5431                                                    |                           |     |     |            |                    |        |    |    |          |     |      |                     |  |

SEE GENERAL NOTES ON PAGE 5413.3 IF THE % FLICKER IS GREATER THAN ALLOWABLE LIMITS.

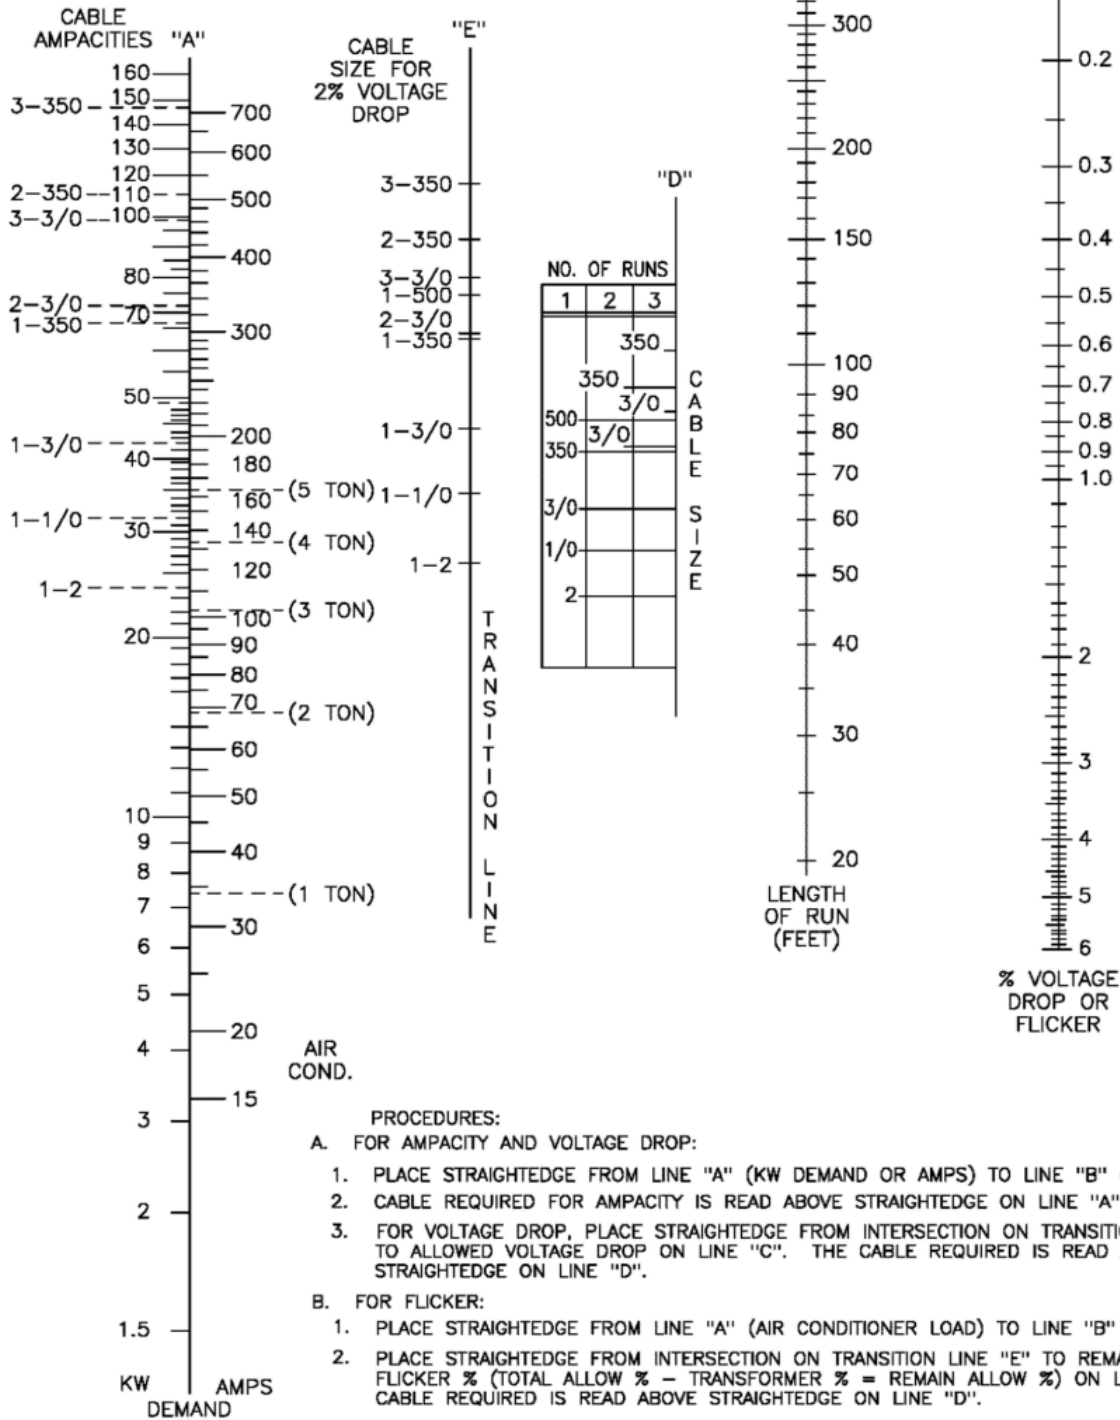

© 1998 - 2025 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   |                   |     |     |     |     |            | E   |        |    |    |     |     |      |
| A   | 5431 MOVED TO FMO | YZZ | FRC | FRC | FRC | 11/06/2025 | D   |        |    |    |     |     |      |

SHEET  
1 OF 5

Indicates Latest Revision

Completely Revised

X New Page

Information Removed


SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

SINGLE-PHASE 120/240V UNDERGROUND VOLTAGE DROP  
AND FLICKER NOMOGRAPH

FMO  
DM5431.1






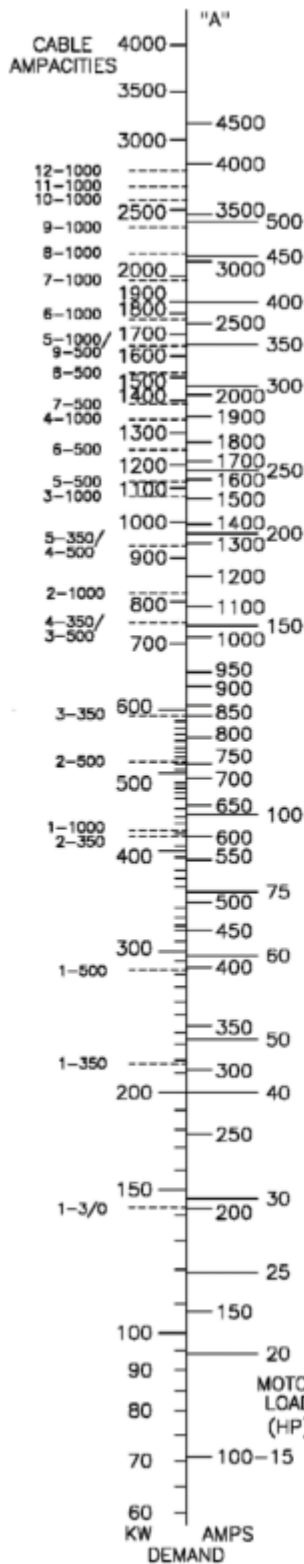

- PROCEDURES:
- A. FOR AMPACITY AND VOLTAGE DROP:
1. PLACE STRAIGHTEDGE FROM LINE "A" (KW DEMAND OR AMPS) TO LINE "B" (LENGTH OF RUN).
  2. (LENGTH OF RUN).
  3. CABLE REQUIRED FOR AMPACITY IS READ ABOVE STRAIGHTEDGE ON LINE "A" FOR VOLTAGE DROP, PLACE STRAIGHTEDGE FROM INTERSECTION ON TRANSITION LINE "E" TO ALLOWED VOLTAGE DROP ON LINE "C". THE CABLE REQUIRED IS READ ABOVE STRAIGHTEDGE ON LINE "D".
- B. FOR FLICKER:
1. PLACE STRAIGHTEDGE FROM LINE "A" (MOTOR LOAD) TO LINE "B" (LENGTH OF RUN).
  2. PLACE STRAIGHTEDGE FROM INTERSECTION ON TRANSITION LINE "E" TO REMAINING ALLOWABLE FLICKER % (TOTAL ALLOW % - TRANSFORMER % = REMAIN ALLOW %) ON LINE "C". THE CABLE REQUIRED IS READ ABOVE STRAIGHTEDGE ON LINE "D".

SEE GENERAL NOTES ON PAGE 5413.3 IF THE % FLICKER IS GREATER THAN ALLOWABLE LIMITS.

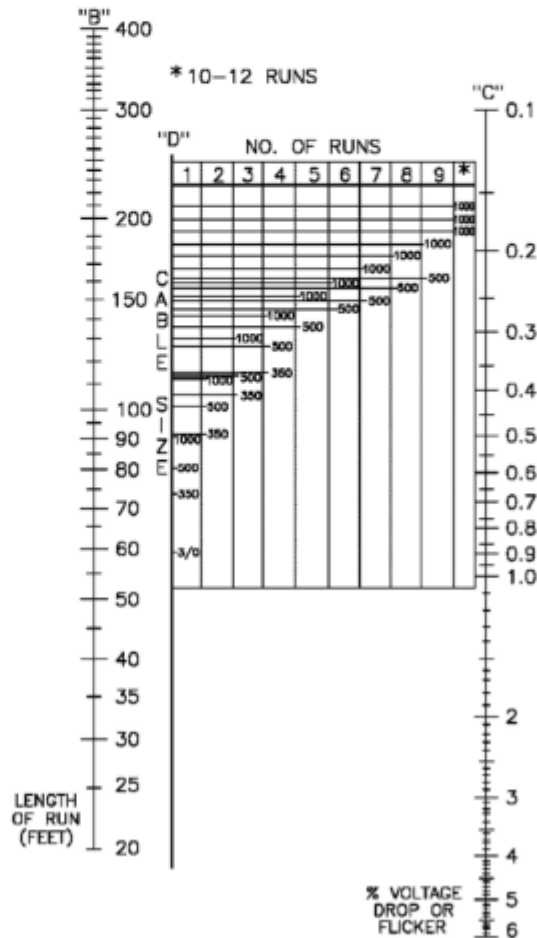

© 1998 - 2025 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   |                   |     |     |     |     |            | E   |        |    |    |     |     |      |
| A   | 5431 MOVED TO FMO | YZZ | FRC | FRC | FRC | 11/06/2025 | D   |        |    |    |     |     |      |

SHEET  
4 OF 5

Indicates Latest Revision

Completely Revised

X New Page


Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

3Ø 277/480Y UNDERGROUND NOMOGRAPH

FMO  
DM5431.4

PLACE STRAIGHTEDGE FROM KW DEMAND OR AMPS (LINE "A") TO LENGTH OF RUN (LINE "B"). THEN FROM THE TRANSITION POINT (LINE "E") TO THE SIZE OF CABLE (LINE "D"). READ THE % VOLTAGE DROP (LINE "C") FOR THAT SEGMENT OF CABLE.

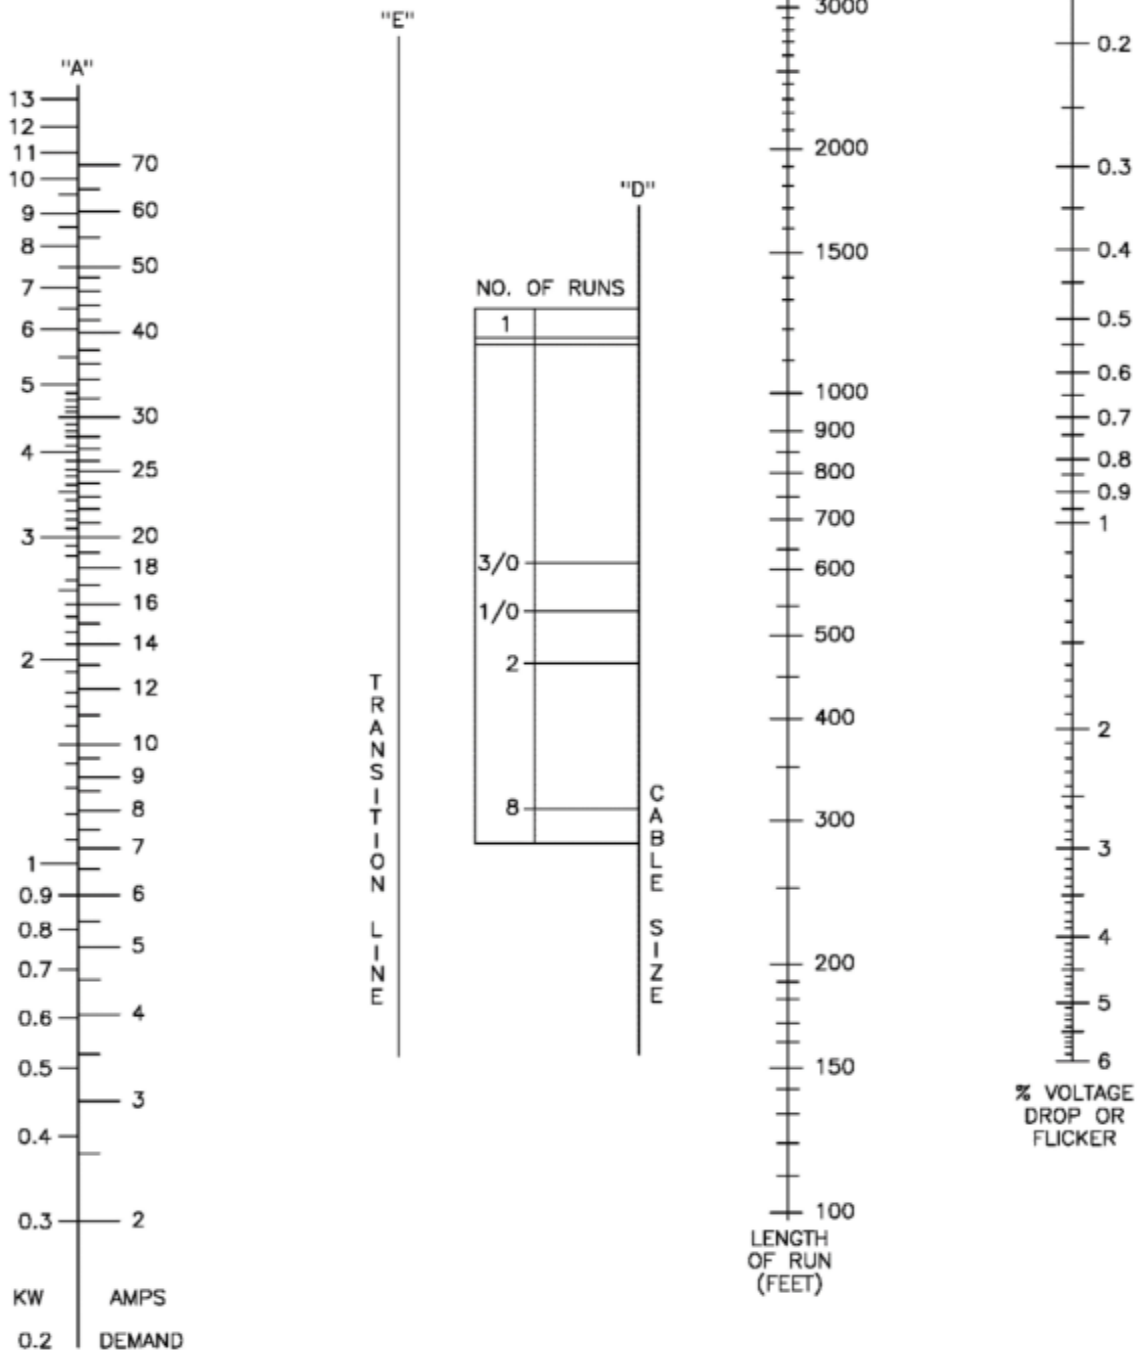

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   |                   |     |     |     |     |            | E   |        |    |    |     |     |      |
| A   | 5431 MOVED TO FMO | YZZ | FRC | FRC | FRC | 11/06/2025 | D   |        |    |    |     |     |      |

SHEET  
5 OF 5

Indicates Latest Revision

Completely Revised

**X** New Page

Information Removed

SDG&amp;E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

# SINGLE-PHASE 120/240V UNDERGROUND STREET LIGHT NOMOGRAPH

FMO  
DM5431.5

FMO  
DM5432

## PROCEDURES:

## A. FOR AMPACITY AND VOLTAGE DROP:


1. PLACE STRAIGHTEDGE FROM LINE "A" (KW DEMAND OR AMPS) TO LINE "B" (LENGTH OF RUN).
2. WIRE REQUIRED FOR AMPACITY IS READ OFF TABLE BELOW.
3. FOR VOLTAGE DROP, PLACE STRAIGHTEDGE FROM INTERSECTION ON TRANSITION LINE "E" TO ALLOWED VOLTAGE DROP ON LINE "C". THE CABLE REQUIRED IS READ ABOVE STRAIGHTEDGE ON LINE "D".

## B. FOR FLICKER:

1. PLACE STRAIGHTEDGE FROM LINE "A" (AIR CONDITIONER LOAD) TO LINE "B" (LENGTH OF RUN).
2. PLACE STRAIGHTEDGE FROM INTERSECTION ON TRANSITION LINE "E" TO REMAINING ALLOWABLE FLICKER % (TOTAL ALLOW % - TRANSFORMER % = REMAIN ALLOW %) ON LINE "C". THE CABLE REQUIRED IS READ ABOVE STRAIGHTEDGE ON LINE "D".

NOTE: RACK CONSTRUCTION PRODUCES LOWER VOLTAGE DROP THAN CROSS-ARM CONSTRUCTION DUE TO THE SHORTER DISTANCE BETWEEN CONDUCTORS.

SEE PAGES 5411.1-5411.6 FOR INSTRUCTIONS ON HOW TO SIZE CABLE FOR COMPOUND OR COMPLEX SYSTEMS.

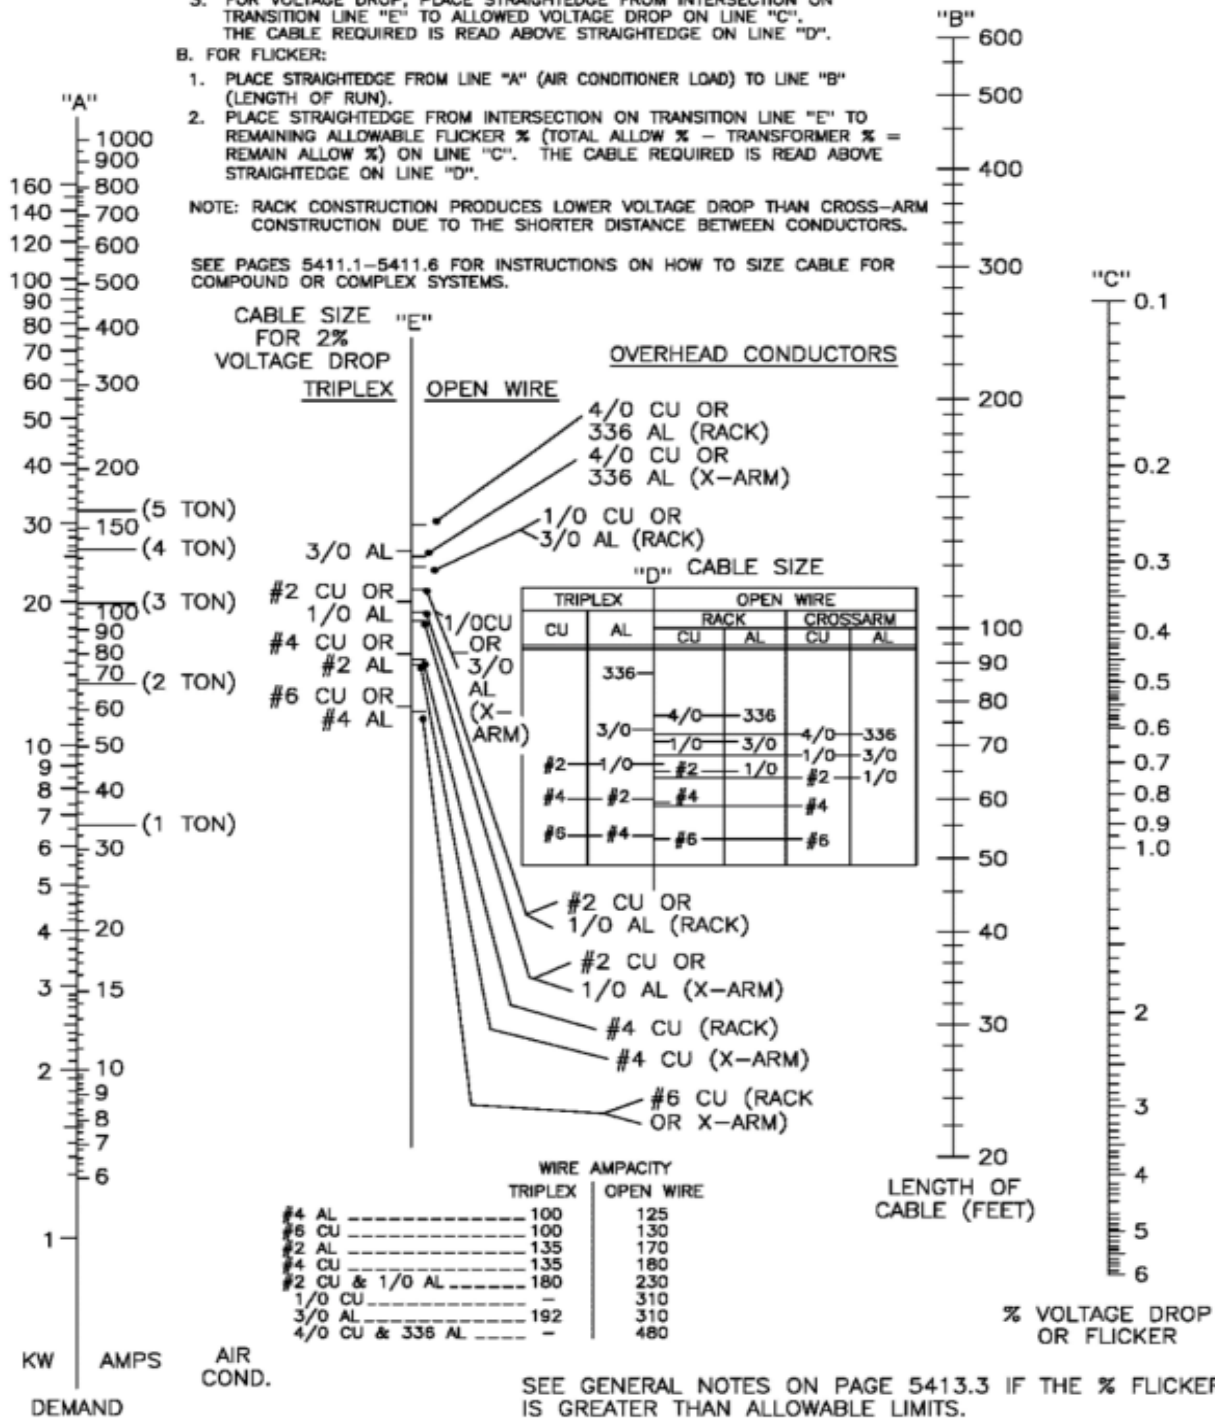

© 1998 - 2025 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   |                   |     |     |     |     |            | E   |        |    |    |     |     |      |
| A   | 5432 MOVED TO FMO | YZZ | FRC | FRC | FRC | 11/06/2025 | D   |        |    |    |     |     |      |

Indicates Latest Revision

Completely Revised

X New Page


Information Removed

SHEET  
1 OF 4

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

SINGLE-PHASE 120/240V OVERHEAD VOLTAGE DROP  
AND FLICKER NOMOGRAPH

FMO  
DM5432.1

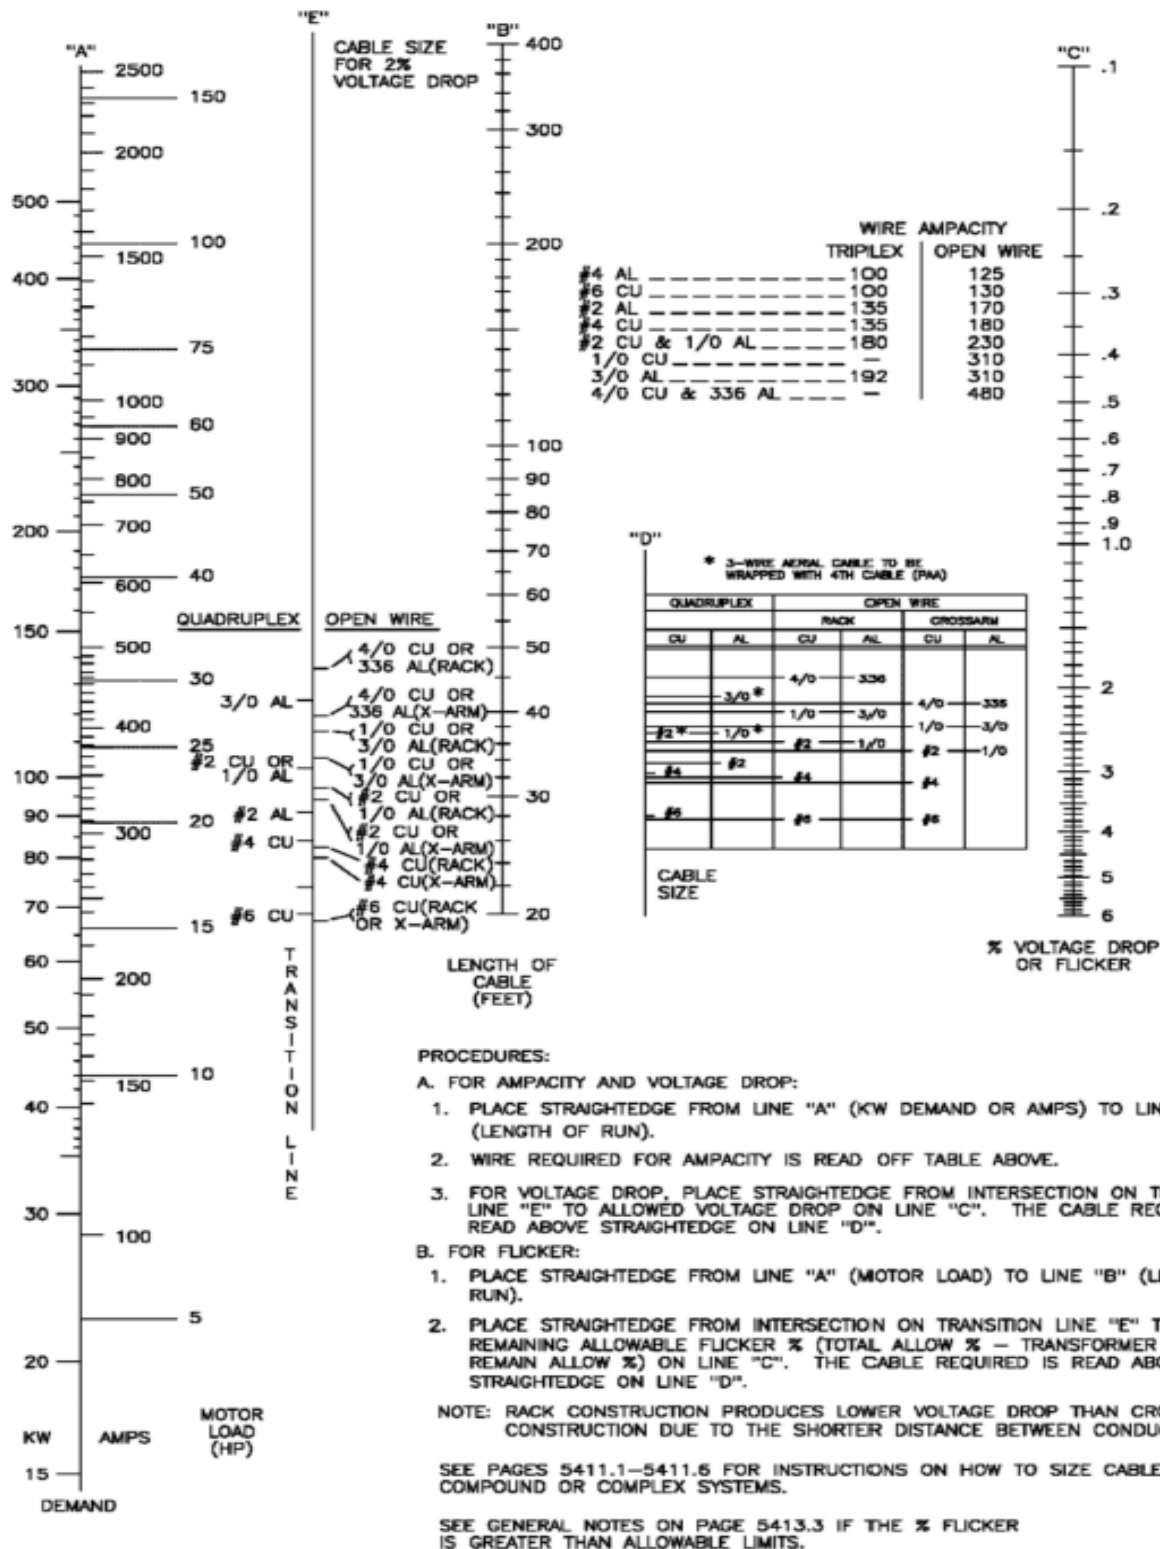

© 1998 - 2025 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   |                   |     |     |     |     |            | E   |        |    |    |     |     |      |
| A   | 5432 MOVED TO FMO | YZZ | FRC | FRC | FRC | 11/06/2025 | D   |        |    |    |     |     |      |

SHEET  
2 OF 4

Indicates Latest Revision

Completely Revised


X New Page

Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

THREE PHASE 120/208Y OVERHEAD VOLTAGE DROP  
AND FLICKER NOMOGRAPH

FMO  
DM5432.2

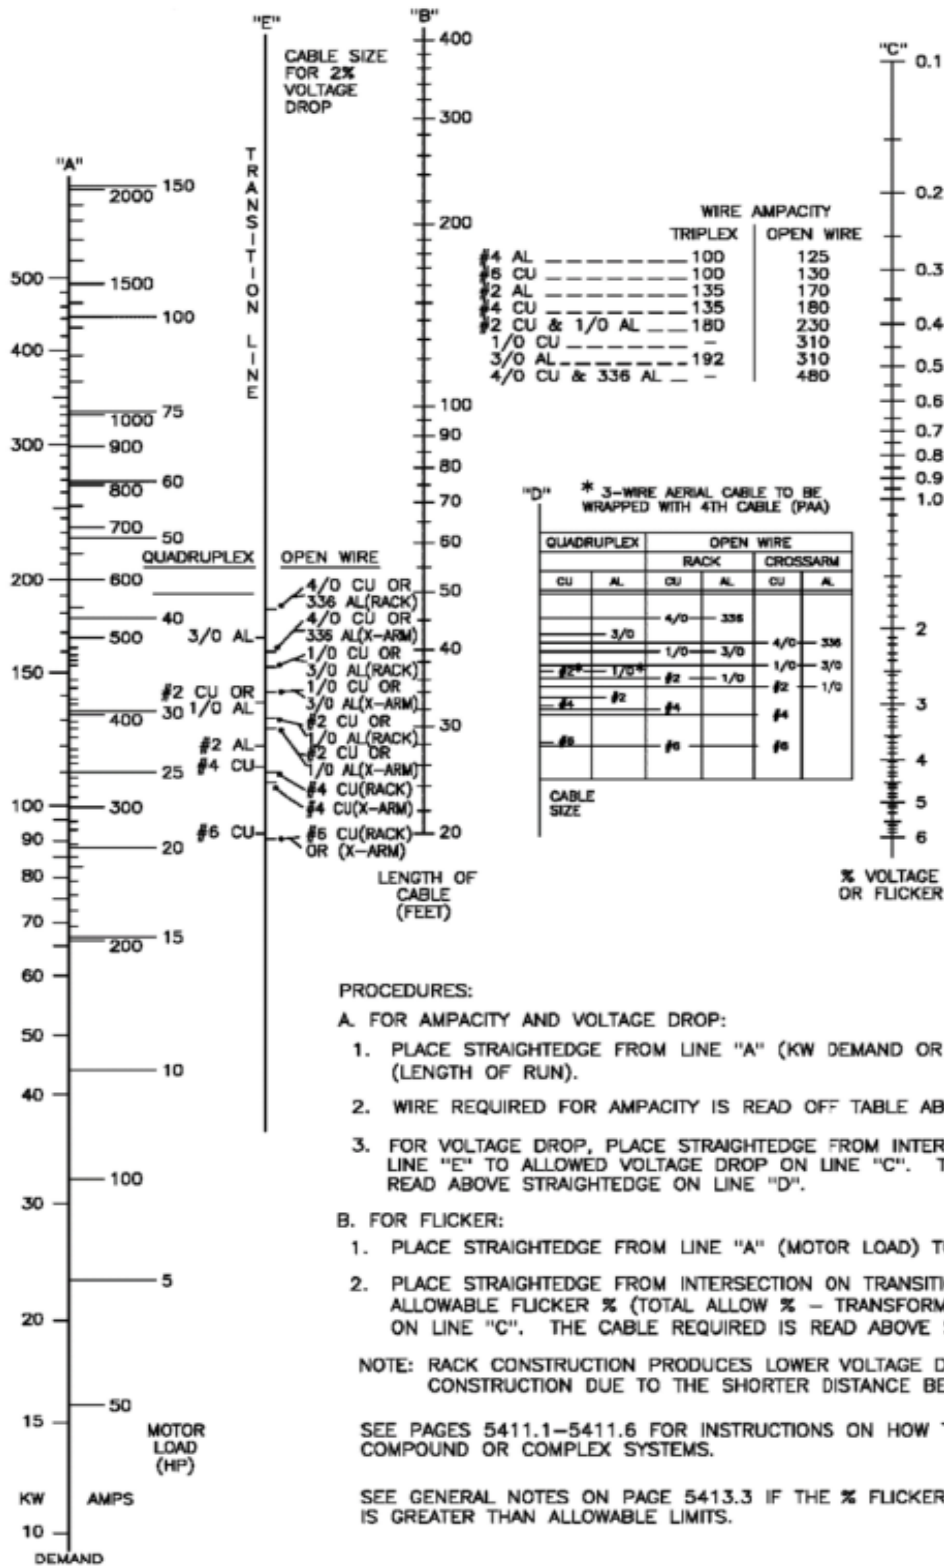

© 1998 - 2025 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   |                   |     |     |     |     |            | E   |        |    |    |     |     |      |
| A   | 5432 MOVED TO FMO | YZZ | FRC | FRC | FRC | 11/06/2025 | D   |        |    |    |     |     |      |

SHEET  
3 OF 4

Indicates Latest Revision

Completely Revised


X New Page

Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

THREE PHASE 120/240V OVERHEAD VOLTAGE DROP  
AND FLICKER NOMOGRAPH

FMO  
DM5432.3

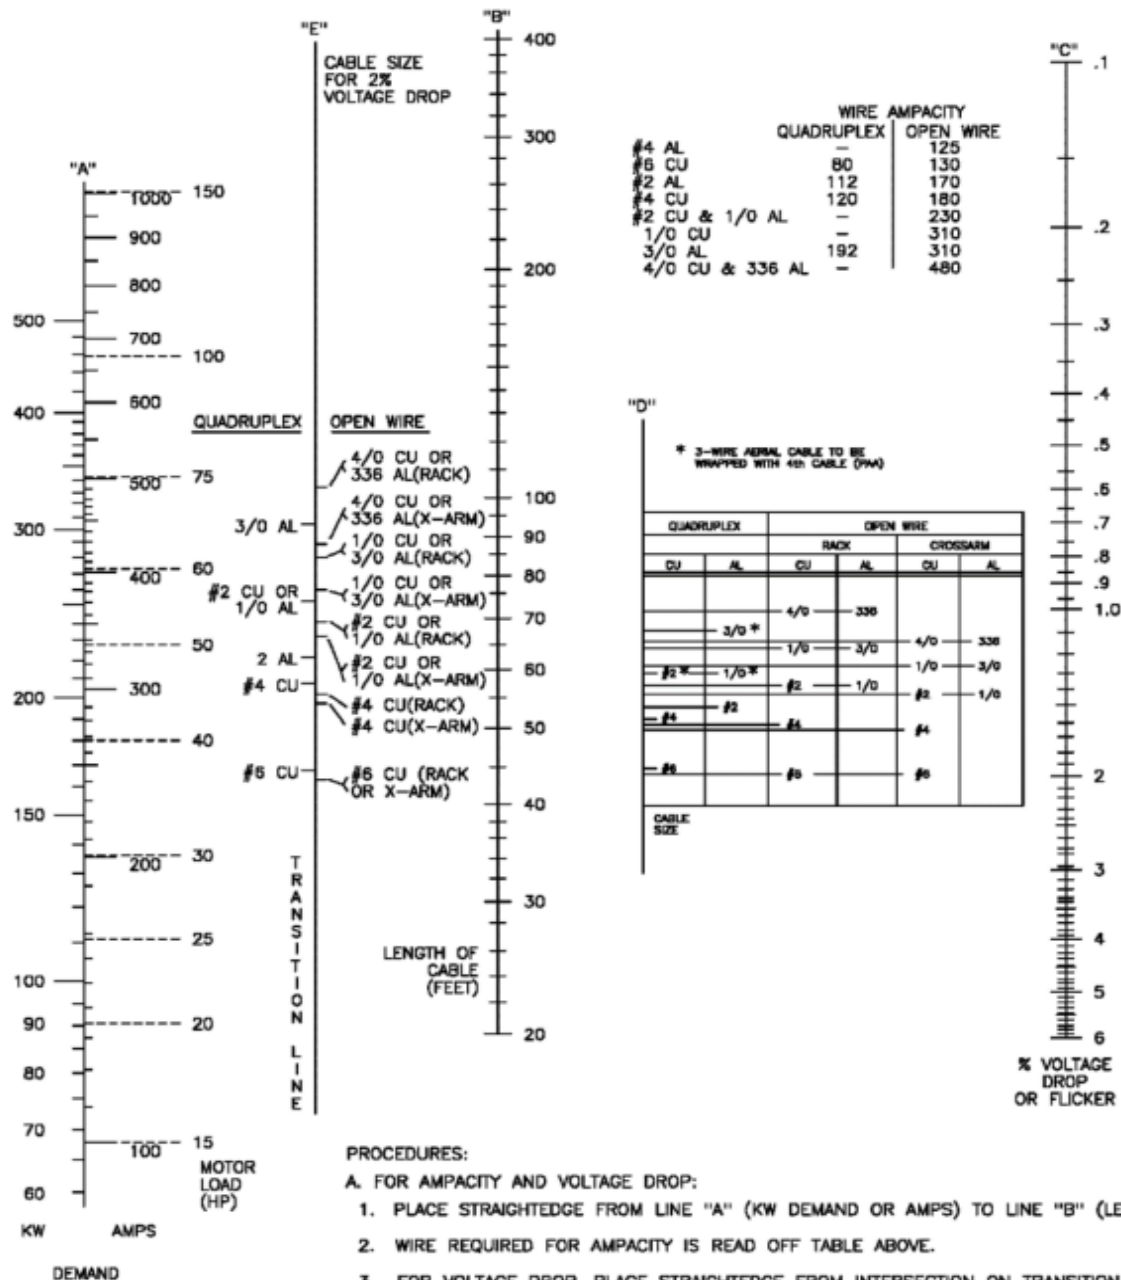

© 1998 - 2025 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   |                   |     |     |     |     |            | E   |        |    |    |     |     |      |
| A   | 5432 MOVED TO FMO | YZZ | FRC | FRC | FRC | 11/06/2025 | D   |        |    |    |     |     |      |

**SHEET  
4 OF 4**

Indicates Latest Revision

Completely Revised

X New Page

Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

**THREE PHASE 480 OVERHEAD VOLTAGE DROP  
AND FLICKER NOMOGRAPH**

**FMO  
DM5432.4**



**5500**  
**CONDUCTOR**  
**AMPACITIES**

**5500**  
**CONDUCTOR**  
**AMPACITIES**

5500 - No FMO standards for this section.



5600

TRANSFORMERS

5600

TRANSFORMERS

5600 - No FMO standards for this section.



**5700  
PADS &  
SUBSTRUCTURES**

**5700  
PADS &  
SUBSTRUCTURES**





## TABLE OF CONTENTS

**REVISION HISTORY:**

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

SHEET  
1 OF 1

ELECTRIC VAULT DESIGN TABLES FOR SDG&amp;E INTERNAL USE

FMO  
DM5745

24.6. The following tables apply only to existing or legacy vaults. All new vault installations shall comply with DM5745, which requires a minimum floor-to-ceiling height of 12 feet.

24.6.1. Below grade single transformer vault requirements for 120/208V.

| CUST. BOARD | 208V TRANSF. SIZE | FRONT TO BACK* | WALL TO WALL | ALONG W/ TRANSF. SWITCH INSTALLED ON SIDE WALL. |          | ALONG W/ TRANSF. SWITCH INSTALLED ON END WALL |            | FLOOR TO CEILING | CEILING EQUIPMENT  | TRANSF. | SUMP |
|-------------|-------------------|----------------|--------------|-------------------------------------------------|----------|-----------------------------------------------|------------|------------------|--------------------|---------|------|
| SIZE        | (KVA)             | L LENGTH       | W WIDTH      | L LENGTH                                        | W WIDTH  | L LENGTH                                      | W WIDTH    | HEIGHT           | OPENING            | WEIGHT  | CAP. |
| 200         | 75                | 13' - 6"       | 9' - 6"      | NA                                              | NA       | NA                                            | NA         | 8' - 0"          | 4' - 6" X 6' - 6"  | 3,500   | 240  |
| 400         | 150               | 13' - 6"       | 9' - 6"      | NA                                              | NA       | NA                                            | NA         | 8' - 0"          | 4' - 6" X 6' - 6"  | 3,900   | 240  |
| 600         | 225               | 14' - 0"       | 9' - 6"      | NA                                              | NA       | NA                                            | NA         | 8' - 0"          | 5' - 0" X 6' - 6"  | 4,200   | 240  |
| 800         | 300               | 15' - 0"       | 10' - 6"     | NA                                              | NA       | NA                                            | NA         | 8' - 6"          | 6' - 0" X 7' - 6"  | 5,000   | 255  |
| 1000        | 300               | 15' - 0"       | 10' - 6"     | NA                                              | NA       | NA                                            | NA         | 8' - 6"          | 6' - 0" X 7' - 6"  | 5,000   | 255  |
| 1200        | 500               | 16' - 6"       | 12' - 6"     | 21' - 6"                                        | 15' - 0" | 19' - 6"                                      | 20' - 9" * | 9' - 0"          | 6' - 6" X 7' - 6"  | 6,600   | 290  |
| 1600        | 500               | 16' - 6"       | 12' - 6"     | 21' - 6"                                        | 15' - 0" | 19' - 6"                                      | 20' - 0" * | 9' - 0"          | 6' - 6" X 7' - 6"  | 6,600   | 290  |
| 2000        | 750               | 17' - 0"       | 12' - 6"     | 22' - 6"                                        | 15' - 0" | 20' - 0"                                      | 20' - 0" * | 9' - 0"          | 7' - 0" X 7' - 6"  | 7,550   | 425  |
| 2500        | 1000              | 18' - 0"       | 13' - 6"     | 23' - 6"                                        | 16' - 6" | 21' - 6"                                      | 20' - 0" * | 10' - 0"         | 8' - 0" X 7' - 6"  | 8,200   | 435  |
| 3000        | 1000              | 18' - 0"       | 13' - 6"     | 23' - 6"                                        | 16' - 6" | 21' - 6"                                      | 20' - 0" * | 10' - 0"         | 8' - 0" X 7' - 6"  | 8,200   | 435  |
| 4000        | 1000<br>1500**    | 20' - 0"       | 16' - 0"     | 25' - 6"                                        | 19' - 0" | 23' - 0"                                      | 20' - 0"   | 11' - 0"         | 10' - 0" X 9' - 0" | 10,150  | 515  |

24.6.2. Below grade multiple transformer installation 120/208 side by side minimum vault dimensions for multi-services.

| LENGTH    | 13'-6" | 13'-6" | 14'-0" | 15'-0" | 15'-0" | 16'-6" | 16'-6" | 17'-0" | 18'-0" | 18'-0" | 20'-0" |
|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| -         | 200i   | 400i   | 600i   | 800i   | 1000i  | 1200i  | 1600i  | 2000i  | 2500i  | 3000i  | 4000i  |
| WIDTH "A" | 9'-6"  | 9'-6"  | 9'-6"  | 10'-6" | 10'-6" | 12'-6" | 12'-6" | 12'-6" | 13'-6" | 13'-6" | 16'-0" |
| WIDTH "B" | 7'-6"  | 7'-6"  | 7'-6"  | 8'-6"  | 8'-6"  | 9'-6"  | 9'-6"  | 9'-6"  | 10'-6" | 10'-6" | 12'-0" |

WIDTH "A" = Minimum vault requirements for one service panel according to main size

WIDTH "B" = Additional vault requirements for each added service main

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE                   | DR  | BY  | DSN | APV | DATE       |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------------------------|-----|-----|-----|-----|------------|
| C   | EDITORIAL CHANGES | YZZ | EJA | MRF | MRF | 04/13/2026 | F   |                          |     |     |     |     |            |
| B   | EDITORIAL CHANGES | YZZ | JES | FRC | JJP | 10/31/2025 | E   |                          |     |     |     |     |            |
| A   | ORIGINAL ISSUE    | -   | -   | -   | -   | 11/20/2018 | D   | 5745 TABLES MOVED TO FMO | YZZ | FRC | FRC | FRC | 07/22/2026 |

SHEET  
1 OF 4

Indicates Latest Revision

Completely Revised

X New Page

Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

SDG&E ELECTRIC VAULT REQUIREMENTS AND SPECIFICATIONS

FMO  
DM5745.1

24.6.3. Below grade minimum electric vault requirements for 277/480V single 3-phase transformer installation.

| CUST. BOARD | 480V TRANSF. SIZE | FRONT TO BACK* | WALL TO WALL | ALONG W/ TRANSF. SWITCH INSTALLED ON SIDE WALL |          | ALONG W/ TRANSF. SWITCH INSTALLED ON END WALL |          | FLOOR TO CEILING | CEILING EQUIPMENT   | TRANSF. | SUMP |
|-------------|-------------------|----------------|--------------|------------------------------------------------|----------|-----------------------------------------------|----------|------------------|---------------------|---------|------|
| SIZE        | (KVA)             | L LENGTH       | W WIDTH      | L LENGTH                                       | W WIDTH  | L LENGTH                                      | W WIDTH  | HEIGHT           | OPENING             | WEIGHT  | CAP. |
| 200         | 150               | 13' - 6"       | 9' - 6"      | NA                                             | NA       | NA                                            | NA       | 8' - 0"          | 4' - 6" X 6' - 6"   | 3,900   | 240  |
| 400         | 300               | 15' - 0"       | 10' - 6"     | NA                                             | NA       | NA                                            | NA       | 8' - 6"          | 6' - 0" X 7' - 6"   | 5,000   | 255  |
| 600         | 500               | 16' - 6"       | 12' - 6"     | 21' - 6"                                       | 15' - 0" | 19' - 6"                                      | 20' - 0" | 9' - 0"          | 6' - 6" X 7' - 6"   | 6,600   | 290  |
| 800         | 500               | 16' - 6"       | 12' - 6"     | 21' - 6"                                       | 15' - 0" | 19' - 6"                                      | 20' - 0" | 9' - 0"          | 6' - 6" X 7' - 6"   | 6,600   | 290  |
| 1000        | 750               | 17' - 0"       | 12' - 6"     | 22' - 6"                                       | 15' - 0" | 20' - 0"                                      | 20' - 0" | 9' - 0"          | 7' - 0" X 7' - 6"   | 7,550   | 425  |
| 1200        | 1000              | 18' - 0"       | 13' - 6"     | 23' - 6"                                       | 16' - 6" | 21' - 6"                                      | 20' - 0" | 10' - 0"         | 8' - 0" X 7' - 6"   | 8,200   | 435  |
| 1600        | 1000              | 18' - 0"       | 13' - 6"     | 23' - 6"                                       | 16' - 6" | 21' - 6"                                      | 20' - 0" | 10' - 0"         | 8' - 0" X 7' - 6"   | 8,200   | 435  |
| 2000        | 1500              | 20' - 0"       | 16' - 0"     | 25' - 6"                                       | 19' - 0" | 23' - 0"                                      | 20' - 0" | 11' - 0"         | 10' - 0" X 9' - 0"  | 10,150  | 515  |
| 2500        | 2000              | 20' - 0"       | 16' - 6"     | 25' - 6"                                       | 19' - 6" | 23' - 0"                                      | 20' - 0" | 12' - 0"         | 10' - 0" X 10' - 0" | 17,300  | 570  |
| 3000        | 2000              | 20' - 0"       | 16' - 6"     | 25' - 6"                                       | 19' - 6" | 23' - 0"                                      | 20' - 0" | 12' - 0"         | 10' - 0" X 10' - 0" | 17,300  | 570  |
| 4000        | 2500<br>3000**    | 20' - 0"       | 16' - 6"     | 25' - 6"                                       | 19' - 6" | 23' - 0"                                      | 20' - 0" | 12' - 0"         | 10' - 0" X 10' - 0" | 17,300  | 580  |

24.6.4. Below grade multiple transformer installation 277/480V side by side minimum vault dimensions for multi-services.

| LENGTH    | 13'-6" | 15'-0" | 16'-6" | 16'-6" | 11'-0" | 12'-0" | 18'-0" | 20'-0" | 20'-0" | 20'-0" | 20'-0" |
|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| -         | 200i   | 400i   | 600i   | 800i   | 1000i  | 1200i  | 1600i  | 2000i  | 2500i  | 3000i  | 4000i  |
| WIDTH "A" | 9'-6"  | 10'-6" | 12'-6" | 12'-6" | 12'-6" | 13'-6" | 16'-0" | 16'-6" | 16'-6" | 16'-6" | 16'-6" |
| WIDTH "B" | 7'-6"  | 8'-6"  | 9'-6"  | 9'-6"  | 9'-6"  | 10'-6" | 10'-6" | 12'-0" | 12'-6" | 12'-6" | 12'-6" |

WIDTH "A" = Minimum vault requirements for one service panel according to main size  
 WIDTH "B" = Additional vault requirements for each added service main

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE                   | DR  | BY  | DSN | APV | DATE       |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------------------------|-----|-----|-----|-----|------------|
| C   | EDITORIAL CHANGES | YZZ | EJA | MRF | MRF | 04/13/2026 | F   |                          |     |     |     |     |            |
| B   | EDITORIAL CHANGES | YZZ | JES | FRC | JJP | 10/31/2025 | E   |                          |     |     |     |     |            |
| A   | ORIGINAL ISSUE    | -   | -   | -   | -   | 11/20/2018 | D   | 5745 TABLES MOVED TO FMO | YZZ | FRC | FRC | FRC | 07/22/2026 |

SHEET  
2 OF 4

Indicates Latest Revision

Completely Revised

X

New Page

Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

SDG&E ELECTRIC VAULT REQUIREMENTS AND SPECIFICATIONS

FMO  
DM5745.2

24.6.5. On grade minimum electric vault requirements for 120/208V single 3-phase transformer installation.

| CUST. BOARD | 208V TRANSF. SIZE  | FRONT TO BACK* | WALL TO WALL | ALONG W/ TRANSF. SWITCH INSTALLED ON SIDE WALL |          | FLOOR TO CEILING | ON GRADE EQUIPMENT OPENING |          | TRANSF. | SUMP | CLEAR & LEVEL WORKING SPACE IN FRONT OF EQUIPMENT OPENING |          |
|-------------|--------------------|----------------|--------------|------------------------------------------------|----------|------------------|----------------------------|----------|---------|------|-----------------------------------------------------------|----------|
| SIZE        | (KVA)              | L LENGTH       | W WIDTH      | L LENGTH                                       | W WIDTH  | HEIGHT           | WIDE                       | WIDE     | WEIGHT  | CAP  | WIDE                                                      | WIDE     |
| 200         | 75                 | 14' - 6"       | 9' - 6"      | 14' - 6"                                       | 12' - 6" | 8' - 0"          | 7' - 6"                    | 6' - 6"  | 3,500   | 240  | 6' - 0"                                                   | 7' - 6"  |
| 400         | 150                | 14' - 6"       | 9' - 6"      | 14' - 6"                                       | 12' - 6" | 8' - 0"          | 7' - 6"                    | 7' - 6"  | 3,900   | 240  | 6' - 0"                                                   | 7' - 6"  |
| 600         | 225                | 16' - 0"       | 9' - 6"      | 16' - 0"                                       | 12' - 6" | 8' - 0"          | 7' - 6"                    | 7' - 6"  | 4,200   | 240  | 6' - 0"                                                   | 7' - 6"  |
| 800         | 300                | 17' - 0"       | 10' - 6"     | 17' - 0"                                       | 13' - 6" | 8' - 0"          | 8' - 6"                    | 8' - 6"  | 5,000   | 255  | 7' - 0"                                                   | 8' - 6"  |
| 1000        | 300                | 17' - 0"       | 10' - 6"     | 17' - 0"                                       | 13' - 6" | 8' - 0"          | 8' - 6"                    | 8' - 6"  | 5,000   | 255  | 7' - 0"                                                   | 8' - 6"  |
| 1200        | 500                | 19' - 6"       | 12' - 6"     | 19' - 6"                                       | 12' - 6" | 9' - 0"          | 8' - 6"                    | 8' - 6"  | 6,600   | 290  | 7' - 0"                                                   | 8' - 6"  |
| 1600        | 500                | 19' - 6"       | 12' - 6"     | 19' - 6"                                       | 12' - 6" | 9' - 0"          | 8' - 6"                    | 8' - 6"  | 6,600   | 290  | 7' - 0"                                                   | 8' - 6"  |
| 2000        | 750                | 20' - 0"       | 12' - 6"     | 20' - 0"                                       | 15' - 6" | 9' - 0"          | 8' - 6"                    | 8' - 6"  | 7,550   | 425  | 8' - 0"                                                   | 8' - 6"  |
| 2500        | 1000               | 21' - 0"       | 13' - 6"     | 21' - 0"                                       | 16' - 6" | 10' - 0"         | 8' - 6"                    | 8' - 6"  | 8,200   | 435  | 8' - 0"                                                   | 8' - 6"  |
| 3000        | 1000               | 21' - 0"       | 13' - 6"     | 21' - 0"                                       | 16' - 6" | 10' - 0"         | 8' - 6"                    | 8' - 6"  | 8,200   | 435  | 8' - 0"                                                   | 8' - 6"  |
| 4000        | 100cr...<br>1500.. | 23' - 0"       | 16' - 0"     | 23' - 0"                                       | 19' - 0" | 11' - 0"         | 10' - 0"                   | 10' - 0" | 10,150  | 515  | 10' - 0"                                                  | 10' - 0" |

24.6.6. On grade multiple transformer installation 120/208V side by side minimum vault dimensions for multi-services.

| LENGTH    | 14'-6" | 14'-6" | 16'-0" | 11'-0" | 11'-0" | 19'-6" | 19'-6" | 20'-0" | 21'-0" | 21'-0" | 23'-0" |
|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| -         | 200i   | 400i   | 600i   | 800i   | 1000i  | 1200i  | 1600i  | 2000i  | 2500i  | 3000i  | 4000i  |
| WIDTH "A" | 9'-6"  | 9'-6"  | 9'-6"  | 10'-6" | 10'-6" | 12'-6" | 12'-6" | 12'-6" | 13'-6" | 13'-6" | 16'-6" |
| WIDTH "B" | 7'-6"  | 7'-6"  | 7'-6"  | 8'-6"  | 8'-6"  | 9'-6"  | 9'-6"  | 9'-6"  | 10'-6" | 10'-6" | 12'-0" |

WIDTH "A" = Minimum vault requirements for one service panel according to main size

WIDTH "B" = Additional vault requirements for each added service main

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE                   | DR  | BY  | DSN | APV | DATE       |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------------------------|-----|-----|-----|-----|------------|
| C   | EDITORIAL CHANGES | YZZ | EJA | MRF | MRF | 04/13/2026 | F   |                          |     |     |     |     |            |
| B   | EDITORIAL CHANGES | YZZ | JES | FRC | JJP | 10/31/2025 | E   |                          |     |     |     |     |            |
| A   | ORIGINAL ISSUE    | -   | -   | -   | -   | 11/20/2018 | D   | 5745 TABLES MOVED TO FMO | YZZ | FRC | FRC | FRC | 07/22/2026 |

SHEET  
3 OF 4

Indicates Latest Revision

Completely Revised



New Page

Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

SDG&E ELECTRIC VAULT REQUIREMENTS AND SPECIFICATIONS

FMO  
DM5745.3

24.6.7. On grade minimum electric vault requirements for 277/480V single 3-phase transformer installation.

| CUST. BOARD | 480V TRANSF. SIZE | FRONT TO BACK* | WALL TO WALL | ALONG W/ TRANSF. SWITCH INSTALLED ON SIDE WALL |          | FLOOR TO CEILING | ON GRADE EQUIPMENT OPENING |          | TRANSF. | SUMP | CLEAR & LEVEL WORKING SPACE IN FRONT OF EQUIPMENT OPENING |          |
|-------------|-------------------|----------------|--------------|------------------------------------------------|----------|------------------|----------------------------|----------|---------|------|-----------------------------------------------------------|----------|
| SIZE        | (KVA)             | L LENGTH       | W WIDTH      | L LENGTH                                       | W WIDTH  | HEIGHT           | WIDE                       | WIDE     | WEIGHT  | CAP  | WIDE                                                      | WIDE     |
| 200         | 150               | 14' - 6"       | 9' - 6"      | 14' - 6"                                       | 12' - 6" | 8' - 0"          | 7' - 6"                    | 7' - 6"  | 3,900   | 240  | 6' - 0"                                                   | 7' - 7"  |
| 400         | 300               | 11' - 0"       | 10' - 6"     | 17' - 0"                                       | 13' - 6" | 8' - 6"          | 8' - 0"                    | 8' - 6"  | 5,000   | 255  | 7' - 0"                                                   | 8' - 6"  |
| 600         | 500               | 19' - 6"       | 12' - 6"     | 19' - 6"                                       | 15' - 6" | 9' - 0"          | 8' - 6"                    | 8' - 6"  | 6,600   | 290  | 7' - 0"                                                   | 8' - 6"  |
| 800         | 500               | 19' - 6"       | 12' - 6"     | 19' - 6"                                       | 15' - 6" | 9' - 0"          | 8' - 6"                    | 8' - 6"  | 6,600   | 290  | 7' - 0"                                                   | 8' - 6"  |
| 1000        | 750               | 12' - 0"       | 12' - 6"     | 20' - 0"                                       | 15' - 6" | 9' - 0"          | 8' - 6"                    | 8' - 6"  | 7,500   | 425  | 8' - 0"                                                   | 8' - 6"  |
| 1200        | 1000              | 21' - 0"       | 13' - 6"     | 21' - 0"                                       | 16' - 6" | 10' - 0"         | 8' - 6"                    | 8' - 6"  | 8,200   | 435  | 8' - 0"                                                   | 8' - 6"  |
| 1600        | 1000              | 21' - 0"       | 13' - 6"     | 21' - 0"                                       | 16' - 6" | 10' - 0"         | 8' - 6"                    | 8' - 6"  | 8,200   | 435  | 8' - 0"                                                   | 8' - 6"  |
| 2000        | 1500              | 23' - 0"       | 16' - 0"     | 23' - 0"                                       | 19' - 0" | 11' - 0"         | 10' - 0"                   | 10' - 0" | 10,150  | 515  | 10' - 0"                                                  | 10' - 0" |
| 2500        | 2000              | 23' - 0"       | 16' - 6"     | 23' - 0"                                       | 19' - 6" | 12' - 0"         | 10' - 0"                   | 10' - 0" | 17,300  | 570  | 10' - 0"                                                  | 10' - 0" |
| 3000        | 2000              | 23' - 0"       | 16' - 6"     | 23' - 0"                                       | 19' - 6" | 12' - 0"         | 10' - 6"                   | 10' - 0" | 17,300  | 570  | 10' - 0"                                                  | 10' - 0" |
| 4000        | 2500<br>3000*     | 23' - 0"       | 16' - 6"     | 23' - 0"                                       | 19' - 6" | 12' - 0"         | 10' - 6"                   | 10' - 0" | 17,300  | 580  | 10' - 0"                                                  | 10' - 0" |

24.6.8. On grade multiple transformer installation 277/480V side by side minimum vault dimensions for multi-services.

| LENGTH    | 14'-6" | 11'-0" | 19'-6" | 19'-6" | 20'-0" | 21'-0" | 21'-0" | 23'-0" | 23'-0" | 23'-0" | 23'-0" |
|-----------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| -         | 200i   | 400i   | 600i   | 800i   | 1000i  | 1200i  | 1600i  | 2000i  | 2500i  | 3000i  | 4000i  |
| WIDTH "A" | 9'-6"  | 10'-6" | 12'-6" | 12'-6" | 12'-6" | 13'-6" | 16'-0" | 16'-6" | 16'-6" | 16'-6" | 16'-6" |
| WIDTH "B" | 7'-6"  | 8'-6"  | 9'-6"  | 9'-6"  | 9'-6"  | 10'-6" | 10'-6" | 12'-0" | 12'-6" | 12'-6" | 12'-6" |

WIDTH "A" = Minimum vault requirements for one service panel according to main size  
 WIDTH "B" = Additional vault requirements for each added service main

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE                   | DR  | BY  | DSN | APV | DATE       |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------------------------|-----|-----|-----|-----|------------|
| C   | EDITORIAL CHANGES | YZZ | EJA | MRF | MRF | 04/13/2026 | F   |                          |     |     |     |     |            |
| B   | EDITORIAL CHANGES | YZZ | JES | FRC | JJP | 10/31/2025 | E   |                          |     |     |     |     |            |
| A   | ORIGINAL ISSUE    | -   | -   | -   | -   | 11/20/2018 | D   | 5745 TABLES MOVED TO FMO | YZZ | FRC | FRC | FRC | 07/22/2026 |

SHEET  
4 OF 4

Indicates Latest Revision

Completely Revised

X

New Page

Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

SDG&E ELECTRIC VAULT REQUIREMENTS AND SPECIFICATIONS

FMO  
DM5745.4



5800  
CAPACITORS

**5800**  
**CAPACITORS**

5800 - No FMO standards for this section.



**5900**  
**WIRE & SUPPORTS**

**5900**  
**WIRE & SUPPORTS**

5900 - No FMO standards for this section.



**6000**  
**SUBSTATION**  
**LOAD FORECASTING**

**6000  
SUBSTATION  
LOAD FORECASTING**

6000 - No FMO standards for this section.



**6100**  
**SECTIONALIZING**  
**& PROTECTION**

**6100**  
**SECTIONALIZING**  
**& PROTECTION**





## **DM6114 FIELD MAINTENANCE ONLY**

ALL VERSIONS LISTED IN FMO ARE SUPERSEDED BY THEIR CURRENT VERSION FOUND INSIDE THE ELECTRIC DISTRIBUTION DESIGN MANUAL.

**REVISION HISTORY:**

**09/16/2024:** MOVED TO FMO

© 1998 - 2024 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   |                   |     |     |     |     |            | E   |        |    |    |     |     |      |
| A   | 6114 MOVED TO FMO | JIK | MAK | FRC | KRG | 09/16/2024 | D   |        |    |    |     |     |      |

SHEET  
1 OF 1

Indicates Latest Revision

Completely Revised



New Page

Information Removed

SDG&amp;E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

## UNDERGROUND SERVICE RESTORER

FMO  
DM6114

## SCOPE

This document provides criteria for the selection and application of 12KV feeder sectionalizing devices on selected high-risk circuits.

## PURPOSE

Application of automatic sectionalizing devices for underground circuits (pad-mounted service restorer and PME3 with SCADA) can be beneficial in reducing the number of customers affected by service interruptions. These devices are also helpful in reducing the projected SAIDI by minimizing the impact of a failure of the unfused high molecular polyethylene (HMWPE or PECH in GFMS or unjacketed cross-linked polyethylene (XLPE) cable.

## CRITERIA

- A. Circuits chosen for study should meet one or more of the following:
  - 1. A high amount of unfused type HMWPE or XLPE cable as defined by
    - a. Total cable length exceeding one mile or
    - b. Exceeding 20 percent of the total underground cable length
  - 2. Underground outage history exceeding three feeder outages over the last three years regardless of cause.
- B. In addition to the above, the application must be prioritized based on the cost-to-benefit (C/B) ratio analysis in Design Manual section 6145. The projected value (the inverse of the C/B ratio) must be greater than one to justify the additional sectionalizing devices. Alternate methods of project methods of project justification may be allowed by Electric Distribution Planning.

## APPLICATION

The circuit under consideration must be examined to ensure that it will meet the switching provisions of Design Manual section 6111 after modification. Service restorers are the preferred device because of the automatic operation and the fact that they can immediately reduce the number of customers affected by an outage. If a service restorer is already in use on a circuit, the PME3 with SCADA should be used where substation SCADA is available or will be available within two years. In cases where the frequency is not as critical, the PME3 with SCADA may be the most economical choice.


- 1. 600A Padmounted Service Restorer
  - a. Consideration must be made regarding the location and length of the unfused cable segments when locating the service restorer. As a general guide, locate the service to maximize the amount of load on the line side of the device and to maximize the circuit length on load side. The service restorer should be located to protect at least one half of the circuit load. If this is not practical, locate to maximize the isolation of the unfused cable sections.
  - b. A line switch is required immediately ahead of the service restorer for maintenance. This may be an overhead gang operated or hookstick switch, a padmount switch, a handhole switch (On-Off), or a manhole switch (group/On-Off). Manhole switches are acceptable for this application but they are not preferred.

FOR FIELD MAINTENANCE ONLY

|                                      |                                                                                     |                           |                    |          |                     |
|--------------------------------------|-------------------------------------------------------------------------------------|---------------------------|--------------------|----------|---------------------|
|                                      |  | Indicates Latest Revision | Completely Revised | New Page | Information Removed |
| REVISION                             | SDG&E DISTRIBUTION DESIGN MANUAL                                                    |                           |                    |          |                     |
| DATE 3-1-02<br>APPD JCE / <i>WCH</i> | UNDERGROUND SERVICE RESTORER APPLICATION CRITERIA                                   |                           |                    |          | 6114.1              |

## APPLICATION (continued)

- c. No load should be connected between the service restorer and the line switch immediately ahead. An exception to this rule would be the placement of a single phase transformer that would only provide secondary service for the actuator device within the service restorer. This single phase transformer may tap the feeder at either the switch, the service restorer or in between. Following is an illustrative one-line diagram for the three optional hookups.

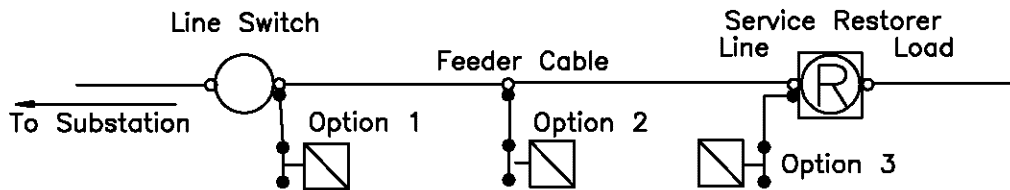

Special Note: DM 6121.3.d.1 requires that a fuse request be submitted and approved prior to installation of un-fused transformer stations.

- d. If the service restorer is located so as to protect a purely underground section it shall be set for one test reclosing 5 seconds after the fault, then lockout. Distribution Planning will determine the number of test reclosings for circuits with overhead spans on the load side of the service restorer.
- e. Distribution Planning must be contacted to obtain settings for all protective devices on the circuit.

### 2. PME3 with SCADA or SCADA Overhead Switch

The PME3 with SCADA should be applied in cases where: 1) A feeder has an existing service restorer and protection (fuse) coordination is not possible. 2) The less expensive SCADA switch will provide adequate protection for the circuit being studied.

- a. If existing subsurface or padmount switchgear is strategically placed for service restoration contact Electric Distribution Standards about SCADA actuator retro-fit. This option can be more economical than other options.
- b. Install SCADA type switches at the midpoint, one-quarter and three-quarter points on the feeder in that order of preference. These may be the new PME3 SCADA switch, SCADA overhead switch, or an existing underground switch retro-fitted with SCADA.
- c. SCADA operated devices may be installed on feeders from current non-SCADA substations where SCADA is not planned within two years. Substations where SCADA is not planned within two years will limit options to automatic protection devices.
- d. Consideration should be given to converting strong tie switches to SCADA.

**FOR FIELD MAINTENANCE ONLY**

|        |                                                                                     |                           |                    |          |                     |             |
|--------|-------------------------------------------------------------------------------------|---------------------------|--------------------|----------|---------------------|-------------|
|        |  | Indicates Latest Revision | Completely Revised | New Page | Information Removed |             |
| 6114.2 | SDG&E DISTRIBUTION DESIGN MANUAL                                                    |                           |                    |          |                     | REVISION    |
|        | UNDERGROUND SERVICE RESTORER APPLICATION CRITERIA                                   |                           |                    |          |                     | DATE 1-1-94 |
|        |                                                                                     |                           |                    |          |                     | APPD MF/ROJ |

## DM6134 FIELD MAINTENANCE ONLY

ALL VERSIONS LISTED IN FMO ARE SUPERSEDED BY THEIR CURRENT VERSION FOUND INSIDE THE ELECTRIC DISTRIBUTION DESIGN MANUAL.

**REVISION HISTORY:**

**04/20/2026: MOVED TO FMO**

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   |                   |     |     |     |     |            | E   |        |    |    |     |     |      |
| A   | 6134 MOVED TO FMO | YZZ | DJB | FRC | FRC | 04/20/2026 | D   |        |    |    |     |     |      |

SHEET  
1 OF 1

Indicates Latest Revision

Completely Revised



New Page

Information Removed

SDG&amp;E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

## RELAY AND FUSE COORDINATION TABLES

FMO  
DM6134.1

| MINIMUM LINE-TO-GROUND FAULT CURRENT REQUIRED FOR COORDINATION |           |      |      |      |       |          |      |      |      |      |      |      |      |           |      |              |      |      |      |      |      |    |
|----------------------------------------------------------------|-----------|------|------|------|-------|----------|------|------|------|------|------|------|------|-----------|------|--------------|------|------|------|------|------|----|
| Relay Type                                                     | KEARNY QA |      |      |      |       | S&C SM-4 |      |      |      | FUSE |      |      |      | TYPE/SIZE |      | EOD/SD EJO-1 |      |      | KB   |      | RTE  | FE |
|                                                                | 75        | 100  | 125  | 150  | 200   | 65       | 80   | 100  | 125  | 150  | 200  | 80   | 100  | 150       | 200  | 80           | 150  |      |      |      |      |    |
| CO-8                                                           | *         | 1950 | 3300 | 4800 | 8400  | *        | 2100 | 3300 | 5100 | 6600 | 8400 | *    | 1050 | 2700      | 3900 | 750          | 2850 | 3900 | *    | *    |      |    |
|                                                                | *         | *    | 1350 | 2730 | 5400  | *        | *    | 1200 | 2700 | 3900 | 4800 | *    | *    | 900       | 2040 | 2910         | *    | 2070 | 2460 | *    | *    |    |
|                                                                | *         | *    | *    | 1800 | 3900  | *        | *    | 840  | 1590 | 2550 | 3450 | *    | *    | 1830      | 2670 | *            | *    | 1770 | 2100 | *    | *    |    |
|                                                                | *         | *    | *    | 1500 | 3300  | *        | *    | *    | 1260 | 1860 | 2820 | *    | *    | *         | 1770 | 2490         | *    | *    | 1350 | 1650 | *    | *  |
|                                                                | *         | *    | *    | *    | 1260  | 2700     | *    | *    | *    | 1110 | 1560 | 2460 | *    | *         | *    | 1710         | 2400 | *    | *    | 1320 | 1290 | *  |
| IAC53                                                          | 1350      | 2640 | 3750 | 5250 | 9000  | 660      | 2700 | 3900 | 5700 | 7200 | 8700 | 675  | 1200 | 3000      | 4200 | 900          | 3300 | 4200 | 700  | *    |      |    |
|                                                                | *         | *    | 2250 | 3750 | 6750  | *        | 750  | 2100 | 3300 | 4800 | 6300 | *    | 960  | 2250      | 3300 | *            | 2160 | 3600 | *    | *    |      |    |
|                                                                | *         | *    | 1110 | 2700 | 5400  | *        | *    | 1140 | 2700 | 3900 | 5100 | *    | 900  | 2040      | 2850 | *            | 1800 | 2400 | *    | *    |      |    |
|                                                                | *         | *    | 900  | 2100 | 4500  | *        | *    | 900  | 1920 | 3300 | 4200 | *    | 840  | 1890      | 2700 | *            | 1560 | 2100 | *    | *    |      |    |
|                                                                | *         | *    | *    | 1500 | 3900  | *        | *    | 840  | 1350 | 2350 | 3450 | *    | *    | 1800      | 2550 | *            | 1350 | 1800 | *    | *    |      |    |
| CO                                                             | *         | *    | 2100 | 3750 | 6600  | *        | 810  | 2100 | 3600 | 4800 | 5850 | *    | *    | 2250      | 3300 | *            | 2160 | 3300 | *    | *    |      |    |
|                                                                | *         | *    | 840  | 2100 | 4500  | *        | *    | 840  | 1980 | 3000 | 4500 | *    | *    | 1950      | 2700 | *            | 1620 | 2100 | *    | *    |      |    |
|                                                                | *         | *    | *    | 1350 | 3750  | *        | *    | *    | 1290 | 2100 | 3300 | *    | *    | 1800      | 2550 | *            | 1350 | 1650 | *    | *    |      |    |
|                                                                | *         | *    | *    | 1230 | 3000  | *        | *    | *    | 1140 | 1680 | 2700 | *    | *    | 1740      | 2400 | *            | 1290 | 1500 | *    | *    |      |    |
|                                                                | *         | *    | *    | 1200 | 2550  | *        | *    | *    | 1050 | 1500 | 2340 | *    | *    | 1650      | 2370 | *            | 1260 | 1350 | *    | *    |      |    |
| CO-AI                                                          | *         | 2400 | 5400 | 7200 | 11700 | *        | 2100 | 3300 | 4800 | 6300 | 7500 | 720  | 1200 | 3000      | 3900 | 900          | 3300 | 4200 | 700  | *    |      |    |
|                                                                | *         | *    | 2100 | 3000 | 5100  | *        | *    | 1380 | 2700 | 3900 | 4800 | *    | 990  | 2250      | 3030 | *            | 2400 | 3300 | *    | *    |      |    |
|                                                                | *         | *    | 1050 | 2100 | 4500  | *        | *    | *    | 1650 | 2700 | 3600 | *    | 900  | 2010      | 2730 | *            | 1950 | 2230 | *    | *    |      |    |
|                                                                | *         | *    | *    | 1680 | 3600  | *        | *    | *    | 1320 | 2040 | 2850 | *    | *    | 1860      | 2640 | *            | 1740 | 1950 | *    | *    |      |    |
|                                                                | *         | *    | *    | 1350 | 2800  | *        | *    | *    | 1140 | 1650 | 2400 | *    | *    | 1800      | 2460 | *            | 1500 | 1750 | *    | *    |      |    |
| IAC51                                                          | 1500      | 2100 | 3000 | 4050 | 6600  | 1560     | 2100 | 3000 | 3900 | 4800 | 6000 | 900  | 1350 | 2750      | 3600 | 1250         | 3000 | 3600 | 900  | *    |      |    |
|                                                                | 1050      | 1500 | 2100 | 2700 | 4650  | 960      | 1380 | 1800 | 2490 | 3600 | 4050 | 800  | 1125 | 2250      | 3000 | 1000         | 2400 | 2700 | 750  | *    |      |    |
|                                                                | 650       | 1125 | 1650 | 2250 | 4050  | 660      | 990  | 1350 | 2030 | 2700 | 3150 | 750  | 1050 | 2000      | 2700 | 800          | 2100 | 2400 | 600  | *    |      |    |
|                                                                | *         | 975  | 1350 | 1900 | 3600  | *        | 840  | 1110 | 1710 | 2100 | 2700 | 680  | 1000 | 1900      | 2600 | 750          | 1800 | 2100 | 600  | *    |      |    |
|                                                                | *         | 840  | 1200 | 1750 | 3000  | *        | 750  | 1020 | 1500 | 2010 | 2550 | 675  | 975  | 1800      | 2500 | 675          | 1650 | 1900 | 600  | *    |      |    |
| IT >                                                           | 1250      | 1500 | 2000 | 2500 | 3750  | 1300     | 1600 | 2000 | 2500 | 3100 | 3700 | 650  | 800  | 1500      | 1800 | 800          | 1700 | 2000 | 550  |      |      |    |

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   | 6134 MOVED TO FMO | YZZ | DJB | FRC | FRC | 04/20/2026 | E   |        |    |    |     |     |      |
| A   | REVISION          | -   | -   | -   | JCE | 01/01/2000 | D   |        |    |    |     |     |      |

SHEET  
1 OF 4

Indicates Latest Revision

Completely Revised

☒ New Page

Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

RELAY AND FUSE COORDINATION TABLES

FMO  
DM6134.1

MINIMUM LINE-TO-GROUND FAULT CURRENT REQUIRED FOR COORDINATION

| MINIMUM LINE-TO-GROUND FAULT CURRENT REQUIRED FOR COORDINATION |           |      |      |      |      |          |      |      |      |      |      |      |      |      |      |           |      |              |      |      |     |      |      |   |     |    |
|----------------------------------------------------------------|-----------|------|------|------|------|----------|------|------|------|------|------|------|------|------|------|-----------|------|--------------|------|------|-----|------|------|---|-----|----|
| Relay Type                                                     | KEARNY QA |      |      |      |      | S&C SM-4 |      |      |      |      | FUSE |      |      |      |      | TYPE/SIZE |      | EOD/SD EJO-1 |      |      |     |      | KB   |   | RTE | FE |
|                                                                | 75        | 100  | 125  | 150  | 200  | 65       | 80   | 100  | 125  | 150  | 200  | 80   | 100  | 150  | 200  | 80        | 150  | 150          |      |      | 150 | 150  | 30   |   |     |    |
| CO-B                                                           | 1         | *    | *    | 2100 | 3900 | 7800     | *    | *    | *    | *    | *    | *    | *    | *    | 2160 | 3600      | *    | *            | 2040 | *    | *   | 3300 | *    |   |     |    |
|                                                                | 2         | *    | *    | *    | 1500 | 4800     | *    | *    | *    | *    | *    | *    | *    | *    | 1830 | 2700      | *    | *            | 1410 | *    | *   | 1800 | *    |   |     |    |
|                                                                | 3         | *    | *    | *    | 1200 | 3600     | *    | *    | *    | *    | *    | *    | *    | *    | 1740 | 2460      | *    | *            | 1290 | *    | *   | 1350 | *    |   |     |    |
|                                                                | 4         | *    | *    | *    | *    | 2430     | *    | *    | *    | *    | *    | *    | *    | *    | 1650 | 2340      | *    | *            | *    | *    | *   | *    | *    |   |     |    |
|                                                                | 5         | *    | *    | *    | *    | 2100     | *    | *    | *    | *    | *    | *    | *    | *    | 1530 | 2250      | *    | *            | *    | *    | *   | *    | *    |   |     |    |
| IAC53                                                          | 1         | *    | 1350 | 3300 | 4800 | 8400     | *    | *    | 2520 | 4500 | 6000 | 7800 | *    | 900  | 2670 | 3750      | *    | *            | 2700 | *    | *   | 3750 | *    |   |     |    |
|                                                                | 2         | *    | *    | *    | 2700 | 6000     | *    | *    | *    | 1200 | 3600 | 5400 | *    | *    | 1980 | 2850      | *    | *            | 1560 | *    | *   | 2340 | *    |   |     |    |
|                                                                | 3         | *    | *    | *    | 1500 | 5100     | *    | *    | *    | 1050 | 1500 | 3600 | *    | *    | 1830 | 2670      | *    | *            | 1380 | *    | *   | 1800 | *    |   |     |    |
|                                                                | 4         | *    | *    | *    | 1275 | 4200     | *    | *    | *    | *    | 1400 | 2550 | *    | *    | 1800 | 2460      | *    | *            | 1320 | *    | *   | 1650 | *    |   |     |    |
|                                                                | 5         | *    | *    | *    | *    | 3000     | *    | *    | *    | *    | 1320 | 2190 | *    | *    | 1710 | 2400      | *    | *            | 1260 | *    | *   | 1290 | *    |   |     |    |
| CO 1                                                           | 1         | *    | *    | *    | 2460 | 6000     | *    | *    | *    | 1320 | 3300 | 5100 | *    | *    | 1980 | 2940      | *    | *            | 1560 | *    | *   | 2250 | *    |   |     |    |
|                                                                | 2         | *    | *    | *    | 1200 | 4200     | *    | *    | *    | *    | 1380 | 2850 | *    | *    | 1770 | 2550      | *    | *            | 1290 | *    | *   | 1500 | *    |   |     |    |
|                                                                | 3         | *    | *    | *    | *    | 2700     | *    | *    | *    | 1320 | 2040 | 1920 | *    | *    | 1650 | 2400      | *    | *            | 1260 | *    | *   | 1275 | *    |   |     |    |
|                                                                | 4         | *    | *    | *    | *    | 2100     | *    | *    | *    | *    | 1920 | 1680 | *    | *    | 1560 | 2280      | *    | *            | *    | *    | *   | *    | *    |   |     |    |
|                                                                | 5         | *    | *    | *    | *    | 1890     | *    | *    | *    | *    | *    | 1680 | *    | *    | 1500 | 2160      | *    | *            | *    | *    | *   | *    | *    |   |     |    |
| CO-AI                                                          | 1         | *    | *    | 2100 | 3900 | 7500     | *    | *    | *    | 3300 | 5400 | 6600 | *    | *    | 2310 | 3300      | *    | *            | 2430 | *    | *   | 3300 | *    |   |     |    |
|                                                                | 2         | *    | *    | *    | 1350 | 4800     | *    | *    | *    | *    | 2250 | 3600 | *    | *    | 1830 | 2700      | *    | *            | 1500 | *    | *   | 1950 | *    |   |     |    |
|                                                                | 3         | *    | *    | *    | 3300 | 3300     | *    | *    | *    | 1350 | 2200 | 1950 | *    | *    | 1725 | 2430      | *    | *            | *    | *    | *   | 1330 | *    |   |     |    |
|                                                                | 4         | *    | *    | *    | *    | 2400     | *    | *    | *    | *    | 1950 | 1770 | *    | *    | 2590 | 2370      | *    | *            | *    | *    | *   | *    | *    |   |     |    |
|                                                                | 5         | *    | *    | *    | *    | 1950     | *    | *    | *    | *    | *    | 1770 | *    | *    | *    | 2250      | *    | *            | *    | *    | *   | *    | *    |   |     |    |
| IAC51                                                          | 1         | *    | 1800 | 2550 | 3700 | 6000     | *    | 1500 | 2100 | 3300 | 4200 | 5400 | *    | 1200 | 2400 | 3150      | *    | *            | 2700 | *    | *   | 3200 | *    |   |     |    |
|                                                                | 2         | *    | *    | *    | 1800 | 2400     | 4500 | *    | *    | 1200 | 2100 | 2760 | 3600 | *    | 1050 | 2100      | 2750 | *            | *    | 2100 | *   | *    | 2400 | * |     |    |
|                                                                | 3         | *    | *    | *    | 1200 | 1950     | 3600 | *    | *    | 1500 | 2100 | 3000 | 3600 | *    | 1000 | 1950      | 2675 | *            | *    | 1800 | *   | *    | 2000 | * |     |    |
|                                                                | 4         | *    | *    | *    | 900  | 1650     | 2400 | *    | *    | 1330 | 1800 | 2500 | 2500 | *    | 900  | 1850      | 2500 | *            | *    | 1650 | *   | *    | 1800 | * |     |    |
|                                                                | 5         | *    | *    | *    | *    | 1450     | 2100 | *    | *    | 1260 | 1530 | 2150 | 2150 | *    | *    | 1800      | 2400 | *            | *    | 1500 | *   | *    | 1700 | * |     |    |
| IT >                                                           | 1250      | 1500 | 2000 | 2500 | 3750 | 1300     | 1600 | 2000 | 2500 | 3100 | 3700 | 650  | 800  | 1500 | 1800 | 800       | 1700 | 2000         | 550  |      |     |      |      |   |     |    |

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   | 6134 MOVED TO FMO | YZZ | DJB | FRC | FRC | 04/20/2026 | E   |        |    |    |     |     |      |
| A   | REVISION          | -   | -   | -   | JCE | 01/01/2000 | D   |        |    |    |     |     |      |

|                 |                                                                  |                           |  |                    |   |          |  |                     |                 |
|-----------------|------------------------------------------------------------------|---------------------------|--|--------------------|---|----------|--|---------------------|-----------------|
| SHEET<br>2 OF 4 |                                                                  | Indicates Latest Revision |  | Completely Revised | X | New Page |  | Information Removed | FMO<br>DM6134.2 |
|                 | SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY |                           |  |                    |   |          |  |                     |                 |
|                 | RELAY AND FUSE COORDINATION TABLES                               |                           |  |                    |   |          |  |                     |                 |

| MINIMUM LINE-TO-GROUND FAULT CURRENT REQUIRED FOR COORDINATION |           |      |      |      |      |          |      |      |      |      |      |     |     |      |      |           |      |      |      |      |              |      |      |      |   |    |  |     |    |
|----------------------------------------------------------------|-----------|------|------|------|------|----------|------|------|------|------|------|-----|-----|------|------|-----------|------|------|------|------|--------------|------|------|------|---|----|--|-----|----|
| Relay Type                                                     | KEARNY QA |      |      |      |      | S&C SM-4 |      |      |      |      | FUSE |     |     |      |      | TYPE/SIZE |      |      |      |      | EOD/SD EJO-1 |      |      |      |   | KB |  | RTE | FE |
|                                                                | 75        | 100  | 125  | 150  | 200  | 65       | 80   | 100  | 125  | 150  | 200  | 80  | 100 | 150  | 200  | 80        | 150  | 200  | 250  | 300  | 350          | 400  | 450  | 500  |   |    |  |     |    |
| CO-8                                                           | *         | *    | *    | 2700 | 7200 | *        | *    | *    | 1950 | 4050 | 6000 | *   | *   | 1950 | 2940 | *         | 1425 | 2250 | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 3900 | 3900 | *        | *    | *    | 1680 | 1300 | 2400 | *   | *   | 1680 | 2490 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 2200 | 2200 | *        | *    | *    | 1530 | *    | 1920 | *   | *   | 1530 | 2340 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 1800 | 1800 | *        | *    | *    | *    | *    | 1740 | *   | *   | *    | 2190 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 1650 | 1650 | *        | *    | *    | *    | *    | 1650 | *   | *   | *    | 2100 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
| IAC53                                                          | *         | *    | *    | 3900 | 8100 | *        | *    | *    | 3600 | 4800 | 6900 | *   | *   | 2190 | 3000 | *         | 2040 | 3450 | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 5100 | 5100 | *        | *    | *    | *    | 1350 | 3600 | *   | *   | 1800 | 2700 | *         | 1290 | 1650 | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 2640 | 2640 | *        | *    | *    | *    | *    | 2220 | *   | *   | 1650 | 2430 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 2040 | 2040 | *        | *    | *    | *    | *    | 1920 | *   | *   | 1560 | 2400 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 1800 | 1800 | *        | *    | *    | *    | *    | 1740 | *   | *   | *    | 2280 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
| CO                                                             | *         | *    | *    | 1170 | 5400 | *        | *    | *    | *    | 1380 | 4200 | *   | *   | 1800 | 2670 | *         | 1290 | 1650 | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 2490 | 2490 | *        | *    | *    | *    | *    | 1920 | *   | *   | 1560 | 2370 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 1890 | 1890 | *        | *    | *    | *    | *    | 1680 | *   | *   | *    | 2250 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 1740 | 1740 | *        | *    | *    | *    | *    | 1650 | *   | *   | *    | 2100 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | *    | *    | *        | *    | *    | *    | *    | 1630 | *   | *   | *    | 2100 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
| CO-A1                                                          | *         | *    | *    | 2850 | 6900 | *        | *    | *    | *    | 4200 | 5900 | *   | *   | 1950 | 3000 | *         | 1700 | 2100 | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 4200 | 4200 | *        | *    | *    | *    | *    | 2700 | *   | *   | 1700 | 2550 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 2050 | 2050 | *        | *    | *    | *    | *    | 1800 | *   | *   | 1500 | 2350 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 1700 | 1700 | *        | *    | *    | *    | *    | *    | *   | *   | *    | 2200 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | *    | *    | *        | *    | *    | *    | *    | *    | *   | *   | *    | 2100 | *         | *    | *    | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
| IAC51                                                          | *         | *    | *    | 3600 | 6000 | *        | *    | *    | 3000 | 3700 | 5150 | *   | *   | 2250 | 3000 | *         | 2550 | 3000 | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 3000 | 4500 | *        | *    | *    | 1880 | 2700 | 3400 | *   | *   | 2000 | 2700 | *         | 1950 | 2250 | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 1650 | 3600 | *        | *    | *    | 1320 | 1920 | 2700 | *   | *   | 1850 | 2500 | *         | 1650 | 1900 | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 1400 | 2700 | *        | *    | *    | *    | 1600 | 2300 | *   | *   | 1800 | 2400 | *         | 1500 | 1750 | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
|                                                                | *         | *    | *    | 1250 | 2400 | *        | *    | *    | *    | 1470 | 2100 | *   | *   | 1700 | 2250 | *         | 1350 | 1500 | *    | *    | *            | *    | *    | *    | * |    |  |     |    |
| IT >                                                           | 1250      | 1500 | 2000 | 2500 | 3750 | 1300     | 1600 | 2000 | 2500 | 3100 | 3700 | 650 | 800 | 1500 | 1800 | 800       | 1700 | 2000 | 2500 | 3000 | 3500         | 4000 | 4500 | 5000 |   |    |  |     |    |
| Indicates Latest Revision                                      |           |      |      |      |      |          |      |      |      |      |      |     |     |      |      |           |      |      |      |      |              |      |      |      |   |    |  |     |    |
| Completely Revised                                             |           |      |      |      |      |          |      |      |      |      |      |     |     |      |      |           |      |      |      |      |              |      |      |      |   |    |  |     |    |
| New Page                                                       |           |      |      |      |      |          |      |      |      |      |      |     |     |      |      |           |      |      |      |      |              |      |      |      |   |    |  |     |    |

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   | 6134 MOVED TO FMO | YZZ | DJB | FRC | FRC | 04/20/2026 | E   |        |    |    |     |     |      |
| A   | REVISION          | -   | -   | -   | JCE | 01/01/2000 | D   |        |    |    |     |     |      |

SHEET  
3 OF 4

Indicates Latest Revision

Completely Revised

X

New Page

Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

RELAY AND FUSE COORDINATION TABLES

FMO  
DM6134.3

MINIMUM LINE-TO-GROUND FAULT CURRENT REQUIRED FOR COORDINATION

| MINIMUM LINE-TO-GROUND FAULT CURRENT REQUIRED FOR COORDINATION |           |      |      |      |      |          |      |      |      |      |      |      |     |        |      |           |              |      |      |      |     |    |    |  |
|----------------------------------------------------------------|-----------|------|------|------|------|----------|------|------|------|------|------|------|-----|--------|------|-----------|--------------|------|------|------|-----|----|----|--|
| Relay Type                                                     | KEARNY QA |      |      |      |      | S&C SM-4 |      |      |      |      | FUSE |      |     |        |      | TYPE/SIZE | EOD/SD EJO-1 | KB   |      |      | RTE | FE |    |  |
|                                                                | 75        | 100  | 125  | 150  | 200  | 65       | 80   | 100  | 125  | 150  | 200  | 80   | 100 | 150    | 200  |           |              | 80   | 150  | 150  |     |    | 30 |  |
| CO-8                                                           | 1         | *    | *    | *    | 6000 | *        | *    | *    | *    | *    | 4800 | *    | *   | 1740   | 2700 | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 2         | *    | *    | *    | 2100 | *        | *    | *    | *    | *    | 1800 | *    | *   | * 2330 | 2200 | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 3         | *    | *    | *    | *    | *        | *    | *    | *    | *    | *    | *    | *   | * 2100 | *    | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 4         | *    | *    | *    | *    | *        | *    | *    | *    | *    | *    | *    | *   | *      | *    | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 5         | *    | *    | *    | *    | *        | *    | *    | *    | *    | *    | *    | *   | *      | *    | *         | *            | *    | *    | *    | *   | *  |    |  |
| IAC53                                                          | 1         | *    | *    | *    | 6400 | *        | *    | *    | *    | *    | 4500 | 6000 | *   | 1980   | 3000 | *         | *            | *    | *    | 2100 | *   | *  |    |  |
|                                                                | 2         | *    | *    | *    | 3670 | *        | *    | *    | *    | *    | 2040 | 1800 | *   | 1550   | 2400 | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 3         | *    | *    | *    | 1860 | *        | *    | *    | *    | *    | *    | *    | *   | * 2280 | 2160 | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 4         | *    | *    | *    | *    | *        | *    | *    | *    | *    | *    | *    | *   | * 2100 | *    | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 5         | *    | *    | *    | *    | *        | *    | *    | *    | *    | *    | *    | *   | *      | *    | *         | *            | *    | *    | *    | *   | *  |    |  |
| CO 1                                                           | 1         | *    | *    | *    | 3750 | *        | *    | *    | *    | *    | 2100 | *    | *   | 1530   | 2400 | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 2         | *    | *    | *    | *    | *        | *    | *    | *    | *    | *    | *    | *   | * 2200 | 2100 | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 3         | *    | *    | *    | *    | *        | *    | *    | *    | *    | *    | *    | *   | *      | *    | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 4         | *    | *    | *    | *    | *        | *    | *    | *    | *    | *    | *    | *   | *      | *    | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 5         | *    | *    | *    | *    | *        | *    | *    | *    | *    | *    | *    | *   | *      | *    | *         | *            | *    | *    | *    | *   | *  |    |  |
| CO-A1                                                          | 1         | *    | *    | *    | 6000 | *        | *    | *    | *    | *    | 5250 | *    | *   | 1725   | 2700 | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 2         | *    | *    | *    | 1950 | *        | *    | *    | *    | *    | 1800 | *    | *   | * 2400 | 2100 | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 3         | *    | *    | *    | *    | *        | *    | *    | *    | *    | *    | *    | *   | *      | *    | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 4         | *    | *    | *    | *    | *        | *    | *    | *    | *    | *    | *    | *   | *      | *    | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 5         | *    | *    | *    | *    | *        | *    | *    | *    | *    | *    | *    | *   | *      | *    | *         | *            | *    | *    | *    | *   | *  |    |  |
| IAC51                                                          | 1         | *    | *    | 1950 | 3000 | 5400     | *    | *    | *    | *    | *    | 4800 | *   | 2200   | 3000 | *         | *            | 2400 | 2700 | *    | *   | *  |    |  |
|                                                                | 2         | *    | *    | *    | 1650 | 3750     | *    | *    | *    | *    | 3000 | *    | *   | 1950   | 2700 | *         | *            | 1800 | 2100 | *    | *   | *  |    |  |
|                                                                | 3         | *    | *    | *    | *    | 2900     | *    | *    | *    | *    | 2400 | *    | *   | 1800   | 2500 | *         | *            | 1350 | 1650 | *    | *   | *  |    |  |
|                                                                | 4         | *    | *    | *    | *    | 2400     | *    | *    | *    | *    | 2100 | *    | *   | 1740   | 2400 | *         | *            | *    | *    | *    | *   | *  |    |  |
|                                                                | 5         | *    | *    | *    | *    | 2100     | *    | *    | *    | *    | 1950 | *    | *   | 1700   | 2300 | *         | *            | *    | *    | *    | *   | *  |    |  |
| IT >                                                           | 1250      | 1500 | 2000 | 2500 | 3750 | 1300     | 1600 | 2000 | 2500 | 3100 | 3700 | 650  | 800 | 1500   | 1800 | 800       | 1700         | 2000 | 550  |      |     |    |    |  |

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   | 6134 MOVED TO FMO | YZZ | DJB | FRC | FRC | 04/20/2026 | E   |        |    |    |     |     |      |
| A   | REVISION          | -   | -   | -   | JCE | 01/01/2000 | D   |        |    |    |     |     |      |

|                 |                                                                  |                    |   |          |                     |                 |
|-----------------|------------------------------------------------------------------|--------------------|---|----------|---------------------|-----------------|
| SHEET<br>4 OF 4 | Indicates Latest Revision                                        | Completely Revised | X | New Page | Information Removed | FMO<br>DM6134.4 |
|                 | SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY |                    |   |          |                     |                 |
|                 | RELAY AND FUSE COORDINATION TABLES                               |                    |   |          |                     |                 |

## TABLE OF CONTENTS

**REVISION HISTORY:**

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

SHEET  
1 OF 1

Completely Revised

Information Removed

## SERVICE RESTORER/FUSE COORDINATION TABLE

FMO  
DM6136.1

SCOPE: This standard shows the minimum line to ground fault current required for safe coordination between service restorers and fuses.

| Service Restorer<br>Ground Slow<br>Setting Curve |    | Fuse Type/Size |      |      |      |      |      |      |      |      |       |       |       |      |      |      |  |
|--------------------------------------------------|----|----------------|------|------|------|------|------|------|------|------|-------|-------|-------|------|------|------|--|
|                                                  |    | QA             |      |      |      |      |      |      |      |      |       |       |       |      |      |      |  |
|                                                  |    | 15             | 20   | 25   | 30   | 40   | 50   | 60   | 75   | 100  | 125   | 150   | 200   | 30   | 80   | 150  |  |
| 14                                               | 18 | 125            | 300  | 400  | 525  | 675  | 875  | 1050 | 1500 | 1975 | 2725  | 3300  | 4800  | 750  | 1250 | 2700 |  |
| 14                                               | 14 | 250            | 425  | 450  | 575  | 750  | 925  | 1200 | 1550 | 2100 | 2700  | 3250  | 5100  | 825  | 1350 | 2700 |  |
| 14                                               | 8  | 450            | 600  | 750  | 900  | 1150 | 1550 | 1750 | 2400 | 3000 | 3900  | 4800  | 7500  | 850  | 1800 | 3600 |  |
| 14                                               | 3  | 125            | 225  | 275  | 375  | 525  | 625  | 825  | 1125 | 1500 | 1800  | 2400  | 3750  | 700  | 1050 | 2100 |  |
| 14                                               | 2  | 175            | 300  | 400  | 525  | 650  | 825  | 1050 | 1350 | 1800 | 2400  | 3000  | 4500  | 725  | 1200 | 2475 |  |
| 14                                               | K  | 300            | 1500 | 1800 | 2250 | 2700 | 3200 | 4400 | 6000 | 7600 | 10000 | 12000 | 18000 | 1050 | 2550 | 5400 |  |
| 70                                               | 18 | *              | *    | *    | *    | 225  | 325  | 450  | 1050 | 1725 | 2325  | 3000  | 4650  | 600  | 1050 | 2550 |  |
| 70                                               | 14 | *              | *    | *    | 225  | 450  | 750  | 975  | 1450 | 1950 | 2475  | 3150  | 5100  | 725  | 1200 | 2650 |  |
| 70                                               | 8  | *              | *    | *    | 600  | 975  | 1275 | 1550 | 2400 | 3000 | 3900  | 4800  | 7500  | 650  | 1500 | 3000 |  |
| 70                                               | 3  | *              | *    | *    | *    | 250  | 375  | 450  | 750  | 1175 | 1575  | 2175  | 3750  | 550  | 900  | 1950 |  |
| 70                                               | 2  | *              | *    | *    | *    | 275  | 400  | 550  | 1075 | 1575 | 2175  | 2925  | 4500  | 600  | 1050 | 2400 |  |
| 70                                               | K  | *              | *    | *    | *    | *    | *    | *    | 1800 | 4500 | 10000 | 12000 | 18000 | 550  | 1050 | 4500 |  |
| 100                                              | 18 | *              | *    | *    | *    | *    | *    | 325  | 525  | 1050 | 2000  | 2700  | 4500  | 525  | 750  | 2325 |  |
| 100                                              | 14 | *              | *    | *    | *    | *    | 425  | 750  | 1350 | 1825 | 2425  | 3100  | 5100  | 700  | 1150 | 2625 |  |
| 100                                              | 8  | *              | *    | *    | *    | 600  | 1050 | 1425 | 2250 | 3000 | 3900  | 4800  | 7500  | 750  | 1650 | 3600 |  |
| 100                                              | 3  | *              | *    | *    | *    | *    | *    | 375  | 600  | 900  | 1350  | 1950  | 3600  | 525  | 750  | 1850 |  |
| 100                                              | 2  | *              | *    | *    | *    | *    | 300  | 425  | 750  | 1350 | 1900  | 2700  | 4500  | 575  | 875  | 2250 |  |
| 100                                              | K  | *              | *    | *    | *    | *    | *    | *    | *    | 600  | 5200  | 9000  | 18000 | *    | 650  | 3300 |  |
| 140                                              | 18 | *              | *    | *    | *    | *    | 275  | 375  | 600  | 1350 | 2100  | 2850  | 4500  | 450  | 650  | 2050 |  |
| 140                                              | 14 | *              | *    | *    | *    | *    | *    | 425  | 1150 | 1725 | 2400  | 3000  | 5100  | 600  | 1050 | 2500 |  |
| 140                                              | 8  | *              | *    | *    | *    | *    | 450  | 1200 | 2100 | 3000 | 3900  | 4800  | 7500  | 700  | 1500 | 3600 |  |
| 140                                              | 3  | *              | *    | *    | *    | *    | *    | *    | 475  | 750  | 1050  | 1775  | 3300  | *    | 450  | 1350 |  |
| 140                                              | 2  | *              | *    | *    | *    | *    | *    | *    | 550  | 900  | 1500  | 2400  | 4500  | 400  | 725  | 2100 |  |
| 140                                              | K  | *              | *    | *    | *    | *    | *    | *    | *    | *    | 825   | 4200  | 19500 | 525  | 675  | 2250 |  |
| 170                                              | 18 | *              | *    | *    | *    | *    | *    | *    | *    | 600  | 900   | 1800  | 4500  | *    | 600  | 1650 |  |
| 170                                              | 14 | *              | *    | *    | *    | *    | *    | *    | 750  | 1500 | 2100  | 3000  | 4900  | 550  | 900  | 2400 |  |
| 170                                              | 8  | *              | *    | *    | *    | *    | *    | 750  | 1350 | 2700 | 3750  | 4800  | 7500  | 675  | 1250 | 3300 |  |
| 170                                              | 3  | *              | *    | *    | *    | *    | *    | *    | *    | 675  | 925   | 1500  | 2800  | *    | 600  | 1500 |  |
| 170                                              | 2  | *              | *    | *    | *    | *    | *    | *    | *    | 725  | 1075  | 2050  | 4450  | *    | 675  | 1800 |  |
| 170                                              | K  | *              | *    | *    | *    | *    | *    | *    | *    | *    | *     | 1200  | 13500 | *    | *    | 1350 |  |
| 200                                              | 18 | *              | *    | *    | *    | *    | *    | *    | *    | *    | 775   | 1350  | 4200  | *    | *    | 1500 |  |
| 200                                              | 14 | *              | *    | *    | *    | *    | *    | *    | *    | 1200 | 2050  | 2725  | 4600  | *    | 750  | 2350 |  |
| 200                                              | 8  | *              | *    | *    | *    | *    | *    | *    | 1500 | 2550 | 3650  | 4500  | 7500  | 600  | 1350 | 3300 |  |
| 200                                              | 3  | *              | *    | *    | *    | *    | *    | *    | *    | 600  | 850   | 1350  | 2700  | *    | 600  | 1400 |  |
| 200                                              | 2  | *              | *    | *    | *    | *    | *    | *    | *    | 600  | 900   | 1725  | 4200  | *    | 650  | 1725 |  |
| 200                                              | K  | *              | *    | *    | *    | *    | *    | *    | *    | *    | *     | 1050  | 8500  | *    | *    | 1425 |  |
| 240                                              | 18 | *              | *    | *    | *    | *    | *    | *    | *    | *    | *     | 1200  | 3400  | *    | *    | 1425 |  |
| 240                                              | 14 | *              | *    | *    | *    | *    | *    | *    | *    | 750  | 1725  | 2700  | 4600  | *    | *    | 2200 |  |
| 240                                              | 8  | *              | *    | *    | *    | *    | *    | *    | *    | 2100 | 3300  | 4500  | 7500  | *    | 950  | 3200 |  |
| 240                                              | 3  | *              | *    | *    | *    | *    | *    | *    | *    | *    | 750   | 1250  | 2600  | *    | *    | 1350 |  |
| 240                                              | 2  | *              | *    | *    | *    | *    | *    | *    | *    | *    | 825   | 1350  | 3900  | *    | *    | 1500 |  |
| 240                                              | K  | *              | *    | *    | *    | *    | *    | *    | *    | *    | *     | *     | 6000  | *    | *    | *    |  |
| 280                                              | 18 | *              | *    | *    | *    | *    | *    | *    | *    | *    | *     | 1050  | 2300  | *    | *    | 1275 |  |
| 280                                              | 14 | *              | *    | *    | *    | *    | *    | *    | *    | *    | 1200  | 2400  | 4500  | *    | *    | 2100 |  |
| 280                                              | 8  | *              | *    | *    | *    | *    | *    | *    | *    | 1700 | 3000  | 4200  | 7500  | *    | *    | 3000 |  |
| 280                                              | 3  | *              | *    | *    | *    | *    | *    | *    | *    | *    | *     | 1150  | 2100  | *    | *    | 1300 |  |
| 280                                              | 2  | *              | *    | *    | *    | *    | *    | *    | *    | *    | *     | 1225  | 3000  | *    | *    | 1350 |  |
| 280                                              | K  | *              | *    | *    | *    | *    | *    | *    | *    | *    | *     | *     | 1500  | *    | *    | *    |  |

NOTES:

\* Will coordinate for all fault current values.

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   | 6136 MOVED TO FMO | YZZ | MOV | FRC | FRC | 07/14/2026 | E   |        |    |    |     |     |      |
| A   | REVISION          | -   | -   | -   | JCE | 01/01/2000 | D   |        |    |    |     |     |      |

SHEET  
1 OF 2

Indicates Latest Revision

Completely Revised

X New Page

Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

SERVICE RESTORER/FUSE COORDINATION TABLE

FMO  
DM6136.1





**6200  
SYSTEM  
ENGINEERING**

**6200  
SYSTEM  
ENGINEERING**





## **DM6213 FIELD MAINTENANCE ONLY**

ALL VERSIONS LISTED IN FMO ARE SUPERSEDED BY THEIR CURRENT VERSION FOUND INSIDE THE ELECTRIC DISTRIBUTION DESIGN MANUAL.

**REVISION HISTORY:**

**05/22/2026:** MOVED TO FMO

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE         | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|----------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   |                |     |     |     |     |            | E   |        |    |    |     |     |      |
| A   | ORIGINAL ISSUE | YZZ | FRC | FRC | JJP | 03/17/2026 | D   |        |    |    |     |     |      |

|                 |                                                                  |                           |  |                    |   |          |  |                     |               |
|-----------------|------------------------------------------------------------------|---------------------------|--|--------------------|---|----------|--|---------------------|---------------|
| SHEET<br>1 OF 1 |                                                                  | Indicates Latest Revision |  | Completely Revised | X | New Page |  | Information Removed | FMO<br>DM6213 |
|                 | SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY |                           |  |                    |   |          |  |                     |               |
|                 | TRANSFORMER PRIMARY VOLTAGE SELECTION                            |                           |  |                    |   |          |  |                     |               |

## SCOPE

This standard provides the proper single-phase primary transformer voltage selection for boosted and unboosted areas on 12kV distribution circuits.

## PURPOSE

This standard was developed to maintain 114 volts minimum (phase to neutral) at the customer's service entrance, based on the Distribution Circuit Profile (Design Standard 6211)

## DEFINITIONS

Boosted Area – a physical location on a 12kV circuit served by a booster to provide 7,200 volts from a 12,000/6,930 volt source for proper operation of 7,200 volt transformers.

Boosted Rating – the kVA nameplate rating of 100 or 333 kVA–1Ø and 1875 or 3750 kVA–3Ø.

Booster Ultimate Loading – the maximum allowable peak loading of a booster is established as 100 percent of booster rating.

## STANDARD

### A. Boosted Area

Transformers rated 7,200 volts should be selected for boosted areas, provided the booster connected kVA will not exceed 90 percent of the booster rating with the kVA additions included.

- When exceeding 90 percent booster rating, Electric Distribution Planning approval is required for 7,200V transformer additions.

### B. Unboosted Areas

1. Transformers rated 6,930 volts will always be selected for new installations in unboosted areas.
2. Transformers rated 6,930 volts will always be selected to replace existing 7,200V transformers in unboosted areas more than 1–1/2 miles from the distribution substation.
3. Transformers rated 6,930 volts will always be selected to replace existing 7,200V transformers in unboosted areas less than 1–1/2 miles from the distribution substation, provided the cost associated with converting live front (7,200V) to deadfront (6,930V) transformers is moderate and the interruption of service does not exceed 1 hour for commercial or 6 hours for residential customers. Where a high cost and/or extended outage time for the conversion is required, the replacement use of 7,200V transformers is acceptable.

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE         | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|----------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   |                |     |     |     |     |            | E   |        |    |    |     |     |      |
| A   | ORIGINAL ISSUE | YZZ | FRC | FRC | JJP | 03/17/2026 | D   |        |    |    |     |     |      |

SHEET  
1 OF 2

Indicates Latest Revision

Completely Revised



New Page

Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

TRANSFORMER PRIMARY VOLTAGE SELECTION

FMO  
DM6213.1

**Example:**

Select the proper transformer primary voltage for the addition of 12–25 kVA single-phase transformers in a boosted area served by a 1875 kVA booster with 1400 kVA already connected.

1. Determine the booster loading requiring Electric Distribution Planning approval; 1875 kVA, booster rating (.9) = 1688 kVA
2. Determine total proposed connected kVA on the booster; 1400 kVA, existing + 300 kVA, proposed = 1700 kVA
3. Obtain Electric Distribution Planning approval for the proposed 7,200V transformer additions. Electric Distribution Planning should consider:
  - If the proposed additional transformers will result in the booster exceeding the booster ultimate loading due to actual demand.
  - If a 6,930 volt source should be brought into the area to serve the proposed additional transformers.

**References:**

1. Design Standard 6211, Distribution Circuit Voltage Profile
2. Service Planning Manual 353, Planned and Requested Outages

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE         | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|----------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   |                |     |     |     |     |            | E   |        |    |    |     |     |      |
| A   | ORIGINAL ISSUE | YZZ | FRC | FRC | JJP | 03/17/2026 | D   |        |    |    |     |     |      |

**SHEET  
2 OF 2**

 Indicates Latest Revision

 Completely Revised

 New Page

 Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

**TRANSFORMER PRIMARY VOLTAGE SELECTION**

**FMO  
DM6213.2**

## **DM6222 FIELD MAINTENANCE ONLY**

ALL VERSIONS LISTED IN FMO ARE SUPERSEDED BY THEIR CURRENT VERSION FOUND INSIDE THE ELECTRIC DISTRIBUTION DESIGN MANUAL.

**REVISION HISTORY:**

**09/16/2024:** MOVED TO FMO

| © 1998 - 2024 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law. |                   |                                                                  |                           |     |     |            |                    |        |    |    |          |     |      |                     |  |               |
|------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------------------------------------------------------|---------------------------|-----|-----|------------|--------------------|--------|----|----|----------|-----|------|---------------------|--|---------------|
| REV                                                                                                                                                  | CHANGE            | DR                                                               | BY                        | DSN | APV | DATE       | REV                | CHANGE | DR | BY | DSN      | APV | DATE |                     |  |               |
| C                                                                                                                                                    |                   |                                                                  |                           |     |     |            | F                  |        |    |    |          |     |      |                     |  |               |
| B                                                                                                                                                    |                   |                                                                  |                           |     |     |            | E                  |        |    |    |          |     |      |                     |  |               |
| A                                                                                                                                                    | 6114 MOVED TO FMO | JIK                                                              | FRC                       | FRC | KRG | 09/16/2024 | D                  |        |    |    |          |     |      |                     |  |               |
| SHEET<br>1 OF 1                                                                                                                                      |                   |                                                                  | Indicates Latest Revision |     |     |            | Completely Revised |        |    | X  | New Page |     |      | Information Removed |  | FMO<br>DM6222 |
|                                                                                                                                                      |                   | SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY |                           |     |     |            |                    |        |    |    |          |     |      |                     |  |               |
|                                                                                                                                                      |                   | APPLICATION OF GROUNDING BANKS                                   |                           |     |     |            |                    |        |    |    |          |     |      |                     |  |               |

## SCOPE

This criteria shall be used for the application of grounding banks. Grounding banks provide a grounded neutral source that is required by load additions which are served by 6.9kV transformers.

## DEFINITIONS

A grounding bank installation consists of three-phase transformers connected grounded wye-delta and is used to provide a ground source for the primary neutral wire. The primary voltage rating of the transformers used can be 12 or 6.9kV. The secondary voltage shall be rated 480 volts or higher (see O.H. Standards page 1195).

## APPLICATION OF GROUNDING BANKS

### A. Why Grounding Banks?

A grounding bank may be installed to serve single-phase load additions using 6.9kV transformers when there are two or fewer grounding banks on a circuit and:

1. Extension of an existing neutral wire, beyond the proper location for a grounding bank, is double the cost of a new grounding bank installation.
2. A neutral connected to an existing grounding bank is available, but additional single-phase load will exceed the recommended kVA limit on the existing grounding bank (see paragraph B.5).

### B. Design Considerations

The following lists several design considerations related to the application of grounding banks.

1. The available short-circuit current sensed by a protective device is reduced approximately 100 amps for each grounding bank between the fault location and the substation. To prevent desensitization of the substation ground relays, the number of grounding banks on a circuit is limited to three installations.
2. A grounding bank should be installed at a central location to enable future loads to take advantage of this neutral source. Since there will normally be a maximum of three grounding banks per circuit, each grounding bank should be located to cover one third of the area served by the circuit.

|                                                                                               |                                                                                     |                           |                                                                                     |                    |                                                                                       |          |
|-----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------|-------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------|----------|
|                                                                                               |  | Indicates Latest Revision |  | Completely Revised |  | New Page |
| REVISION                                                                                      | SDG&E DISTRIBUTION DESIGN MANUAL                                                    |                           |                                                                                     |                    |                                                                                       | 6222.1   |
| DATE 1-1-87                                                                                   | APPLICATION OF GROUNDING BANKS                                                      |                           |                                                                                     |                    |                                                                                       |          |
| APPD CVN/  |                                                                                     |                           |                                                                                     |                    |                                                                                       |          |

3. The recommended location for a grounding bank is on the unfused portion of a circuit, preferably on the feeder because the load on the grounding bank will be served by an energized neutral source except during times when the circuit is interrupted or the grounding bank has failed.
4. Neutrals established by grounding banks should only be used to serve transformers fed from the same circuit.
5. The following are approved grounding bank installations, allowable connected kVA unbalance between phases and maximum connected kVA loading.

| Grounding Bank Installation | Allowable Connected kVA unbalance Between Phases | Maximum Connected kVA Loading (a) |
|-----------------------------|--------------------------------------------------|-----------------------------------|
| 3 – 50 kVA's                | 150 kVA                                          | 1500 kVA                          |
| 3 – 75 kVA's                | 225 kVA                                          | 2250 kVA                          |

- (a) The maximum connected kVA allowed was set at 10 times the unbalance which a grounding bank may tolerate because the load unbalance on the average circuit is 10 percent.
  - b. For more information on overhead grounding banks, refer to O.H. Standards Page 1195.
  6. Single-phase loads served from a grounding bank should be divided equally among the three phases to balance the total load as much as possible.
- If the amount of unbalance cannot be kept within the limits set above, one of the following must be done:
- a. Extend the neutral from the substation and remove the grounding bank. This alternative is recommended if there is significant load growth potential in the area.
  - b. Serve part of the load with 12kV single-phase transformers. Use enough 12kV transformers to reduce the amount of 6.9kV connected kVA below the recommended limit.
  - c. Extend the neutral from another grounding bank, either new or existing, and transfer some 6.9kV load to this neutral. These neutrals are not to be connected to each other.

|        |                                  |                    |          |
|--------|----------------------------------|--------------------|----------|
|        | Indicates Latest Revision        | Completely Revised | New Page |
| 6222.2 | SDG&E DISTRIBUTION DESIGN MANUAL |                    |          |
|        | APPLICATION OF GROUNDING BANKS   |                    |          |
|        | REVISION                         |                    |          |
|        | DATE 1-1-87                      |                    |          |
|        | APPD CVN/RJG                     |                    |          |

# TABLE OF CONTENTS

**REVISION HISTORY:**

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

SHEET  
1 OF 1

Completely Revised

Information Removed

## PRIMARY CONDUCTOR COST COMPARISON

FMO  
DM6241

## SCOPE

This standard uses graphic representation to illustrate the total owning cost (installation plus losses) of different conductor sizes operating at specific load levels. The information presented in this standard is supplemental to Design Standard 5923, "Preferred UG Cable Installation Criteria".


## PURPOSE

This standard was prepared so District Engineering personnel would be able to select the least costly conductor size based on the amount of load which the conductor would serve. The graphs also make it possible for the district engineer to determine the cost penalty associated with installing a larger conductor than necessary to provide adequate tie capacity.

## CRITERIA

The cost illustrated in the graphs below represent the PWARR to install 1000 feet of conductor plus the demand and energy charges associated with distribution system losses. In addition to the conductor cost the Underground Cable Cost Comparison includes the cost of connectors while the Overhead Conductor Cost Comparison includes the cost of poles, crossarms and anchors.

The graphs were constructed assuming the peak load is constant over the physical life of the conductor (20 years for UG, 30 years for OH). An average peak load to be expected over the life of the conductor must be calculated prior to using the graphs if the peak load is not constant (e.g. due to load growth, specific load additions, etc.).

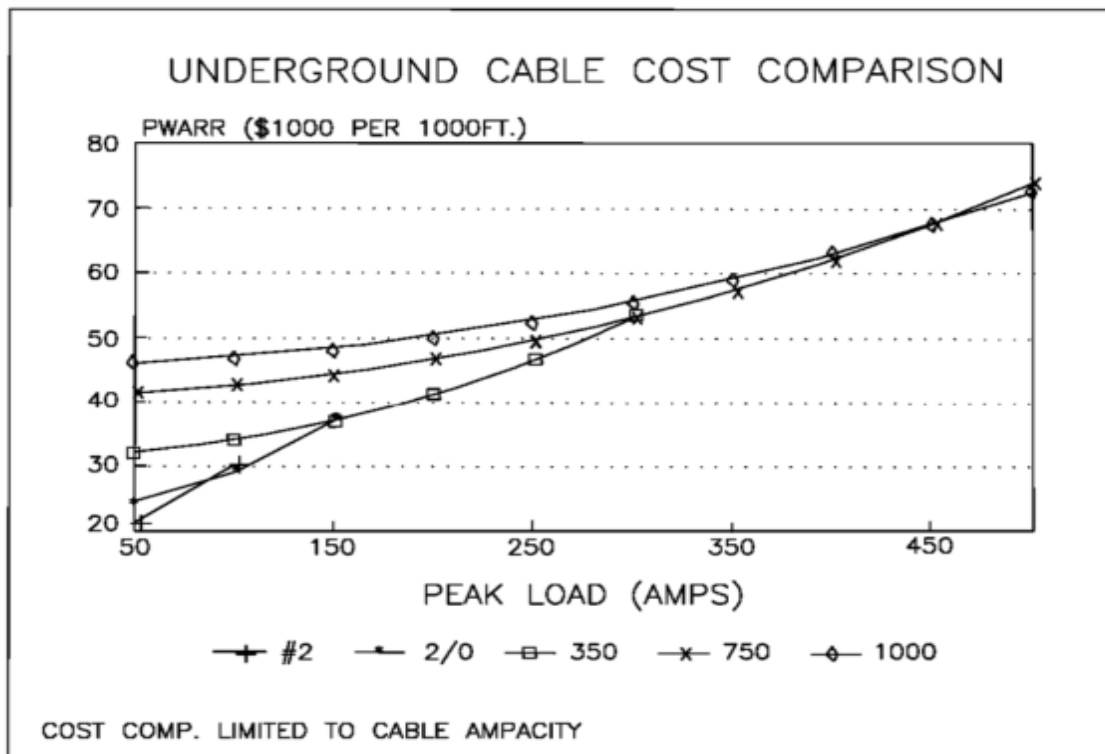

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   | 6241 MOVED TO FMO | YZZ | FRC | FRC | FRC | 07/17/2026 | E   |        |    |    |     |     |      |
| A   | REVISION          | -   | -   | -   | CVN | 01/01/1989 | D   |        |    |    |     |     |      |

SHEET  
1 OF 3

Indicates Latest Revision

Completely Revised

X

New Page


Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

PRIMARY CONDUCTOR COST COMPARISON

FMO  
DM6241.1

## OVERHEAD CONDUCTOR COST COMPARISON

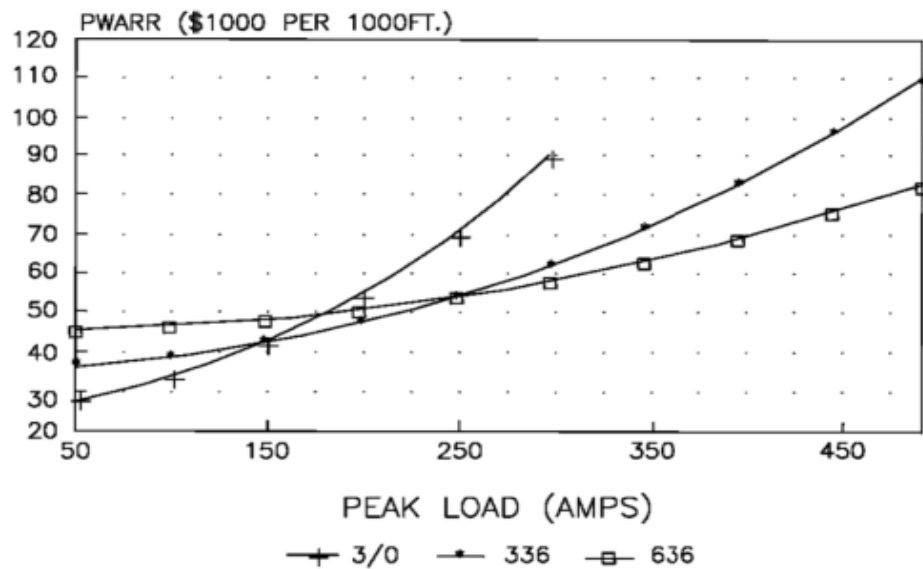

COST COMP. LIMITED TO CABLE AMPACITY

Note: PWARR is for overhead conductor on newly constructed pole line and includes the installed cost of the conductor, poles, crossarms and anchors.

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   | 6241 MOVED TO FMO | YZZ | FRC | FRC | FRC | 07/17/2026 | E   |        |    |    |     |     |      |
| A   | REVISION          | -   | -   | -   | CVN | 01/01/1989 | D   |        |    |    |     |     |      |

SHEET  
2 OF 3

Indicates Latest Revision

Completely Revised

X New Page

Information Removed

SDG&amp;E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

## PRIMARY CONDUCTOR COST COMPARISON

FMO  
DM6241.2

The following constants and assumptions were used to develop the graphs:

1. LACC UG = 16.7% OH = 16.13%
2. Physical Life UG = 20 yrs OH = 30 yrs
3. Energy Charge UG = 4.62¢/kWh OH = 5.44¢/kWh
4. Demand Charge UG = \$97.63/kW OH = 112.5/kW
5. Loss Factor = 0.25
6. Peak Responsibility Factor = 0.80
7. Construction Cost Contingencies = 20%
8. Underground Conductor Parameters:
 

|                     |                        |                      |
|---------------------|------------------------|----------------------|
| 3-1/c #2 PECN-PEJ   | PWARR = \$18,042/1000' | R = .3339 ohms/1000' |
| 3/c #2/0 PECN-PEJ   | PWARR = \$22,656/1000' | R = .1663 ohms/1000' |
| 3/c 350 XLPECN-PEJ  | PWARR = \$31,504/1000' | R = .0649 ohms/1000' |
| 3/c 750 XLPECN-PEJ  | PWARR = \$41,225/1000' | R = .0345 ohms/1000' |
| 3/c 1000 XLPECN-PEJ | PWARR = \$45,625/1000' | R = .0286 ohms/1000' |
9. Overhead Conductor Parameters:
 

|                 |                        |                      |
|-----------------|------------------------|----------------------|
| 3/0 AWG ACSR/AW | PWARR = \$25,726/1000' | R = .1500 ohms/1000' |
| 336 AWG ACSR/AW | PWARR = \$35,335/1000' | R = .0630 ohms/1000' |
| 636 AWG ACSR/AW | PWARR = \$44,633/1000' | R = .0330 ohms/1000' |
10. The book life, which is usually the physical life, is 28 years for UG cable and 36 years for OH conductor. PWARR figures used in this standard incorporated these book lives. However, the energy and demand charges used in this standard reflect historical conductor performance, 20 years for UG cable and 30 years for OH conductors.

The table below present the optimum conductor loading for each conductor size in tabular form:

| Underground Cable Size | Optimum Conductor Peak Loading |
|------------------------|--------------------------------|
| 3-1/c #2               | 0 - 84 amps                    |
| 3/c #2/0               | 85 - 151 amps                  |
| 3/c 350                | 152 - 290 amps                 |
| 3/c 750                | 291 - 445 amps                 |
| 3/c 1000               | > 445 amps                     |

| overhead Cable Size | Optimum Conductor Peak Loading |
|---------------------|--------------------------------|
| 3/0                 | 0 - 151 amps                   |
| 336                 | 152 - 254 amps                 |
| 636                 | > 254 amps                     |

© 1998 - 2026 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law.

| REV | CHANGE            | DR  | BY  | DSN | APV | DATE       | REV | CHANGE | DR | BY | DSN | APV | DATE |
|-----|-------------------|-----|-----|-----|-----|------------|-----|--------|----|----|-----|-----|------|
| C   |                   |     |     |     |     |            | F   |        |    |    |     |     |      |
| B   | 6241 MOVED TO FMO | YZZ | FRC | FRC | FRC | 07/17/2026 | E   |        |    |    |     |     |      |
| A   | REVISION          | -   | -   | -   | CVN | 01/01/1989 | D   |        |    |    |     |     |      |

**SHEET  
3 OF 3**

Indicates Latest Revision

Completely Revised



New Page

Information Removed

SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY

**PRIMARY CONDUCTOR COST COMPARISON**

**FMO  
DM6241.3**

## DM6242 FIELD MAINTENANCE ONLY

ALL VERSIONS LISTED IN FMO ARE SUPERSEDED BY THEIR CURRENT VERSION FOUND INSIDE THE ELECTRIC DISTRIBUTION DESIGN MANUAL.

**REVISION HISTORY:**

**07/18/2025:** MOVED TO FMO

| © 1998 - 2025 San Diego Gas & Electric Company. All rights reserved. Removal of this copyright notice without permission is not permitted under law. |                |                                                                  |     |                    |     |            |          |        |                     |    |               |     |      |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------------------------------------------------------------|-----|--------------------|-----|------------|----------|--------|---------------------|----|---------------|-----|------|--|
| REV                                                                                                                                                  | CHANGE         | DR                                                               | BY  | DSN                | APV | DATE       | REV      | CHANGE | DR                  | BY | DSN           | APV | DATE |  |
| C                                                                                                                                                    |                |                                                                  |     |                    |     |            | F        |        |                     |    |               |     |      |  |
| B                                                                                                                                                    |                |                                                                  |     |                    |     |            | E        |        |                     |    |               |     |      |  |
| A                                                                                                                                                    | ORIGINAL ISSUE | YZZ                                                              | FRC | FRC                | FRC | 07/18/2025 | D        |        |                     |    |               |     |      |  |
| SHEET<br>1 OF 1                                                                                                                                      |                | Indicates Latest Revision                                        |     | Completely Revised |     | X          | New Page |        | Information Removed |    | FMO<br>DM6242 |     |      |  |
|                                                                                                                                                      |                | SDG&E ELECTRIC DISTRIBUTION DESIGN MANUAL FIELD MAINTENANCE ONLY |     |                    |     |            |          |        |                     |    |               |     |      |  |
|                                                                                                                                                      |                | ECONOMIC EVALUATION OF ALTERNATIVES                              |     |                    |     |            |          |        |                     |    |               |     |      |  |

## SCOPE

This standard provides a method of evaluating various alternatives so that the most economical one is identified. The advancement of an overload project to improve reliability is also discussed. For the latest calculation tools used to determine the present value of electric distribution projects, contact Distribution Planning.

## PURPOSE

Present Worth of Annual Revenue Requirements (PWARR) has been selected by the Financial and Economic Analysis section as the appropriate analytical tool for distribution engineering projects. This is because it measures the total impact of a project on SDG&E's customers given the regulated environment of the utility.

## DEFINITIONS

LACC (Levelized Annual Capital Cost) – A factor applied to the installed equipment costs to account for the annual levelized depreciation, return on investment, income taxes, property taxes and salvage.

A/P,n – Converts a present value into an annual series of payments over n years. Refer to the Economic Assumptions Manual, Table 2-1, for the current value.

P/A,n – Provides the present value of an annual series of payments made for n years. Refer to the Economic Assumption Manual, Table 2-1, for the current value.

P/F,n – Provides the present value of a future payment made n years from today. Refer to the Economic Assumption Manual, Table 2-1, for the current value.

Inflation Factor – Accounts for the rise in the price of goods and services over n years.

## CRITERIA

The capital portion of Equation 1 below converts the equipment installed cost (Cost) into an annual series using the LACC Factor to account for taxes and return on investment. Then it sums all these payments into a present value at the time of construction using the P/A factor. In contrast, the O&M portion accounts for those non-capitalized expenditures which are included at the time of installation (O&M) and so the LACC and P/A factors are not applied.

$$PWARR = [(Inflation Factor)(P/F,n)][(Cost)(LACC)(P/A,n)+(O\&M)] \quad \text{Equation 1}$$

$$Inflation Factor = (1+i)^n \quad \text{Equation 2}$$

where: i = rate of inflation

|                                                               |                   |                                  |  |          |
|---------------------------------------------------------------|-------------------|----------------------------------|--|----------|
| <input checked="" type="checkbox"/> Indicates Latest Revision |                   | Completely Revised               |  | New Page |
| REVISION                                                      |                   | SDG&E DISTRIBUTION DESIGN MANUAL |  |          |
| DATE                                                          | 3-1-02            | PWARR ANALYSIS                   |  |          |
| APPD                                                          | JCE <i>1/6/02</i> | 6242.1                           |  |          |

## APPLICATION

PWARR analysis is used to compare alternative construction projects economically. Normally there are benefits associated with each project which have not been assigned a dollar amount and, therefore have not been considered. When the PWARR of one alternative is within 5 percent of another alternative it is appropriate to consider unassigned benefits (i.e. improvements in customer service, sensitivity to changes in input variables, lowest installed cost, etc.) in the decision.

A typical application of the PWARR analysis is shown in Example 1. It considers delaying the construction of a new circuit for two years by increasing tie capacity, thus allowing a load transfer to occur. The alternative is to construct the new circuit next year. Although the lives of the two alternatives are not the same (one ends in 28 years, the other 30), the Finance and Economic Analysis section feels Equation 1 provides a good approximation provided the difference in lives does not exceed 5 years.

### Example 1

One feeder in a 4-EB5" duct is rated at 475 amps but has a projected load of 500 amps next year. To eliminate the projected overload consider shedding 100 amps to an adjacent circuit by constructing a tie next year for \$75k. This will delay having to construct a new circuit, at a cost of \$450k for an additional 2 years. The alternative is to construct the new circuit next year. Which alternative is the least costly considering all costs were provided in next year's dollars?

The following factors were obtained from the economic Assumptions Manual:

$$\begin{aligned} \text{LACC} &= 0.167, \text{ FERC account E367 (book life} = 28 \text{ yrs)} \\ \text{P/A, } 28 &= 8.2217 \\ \text{P/F, } 2 &= 0.8029 \\ \text{A/P, } 2 &= 0.5886 \\ i &= 5\% \end{aligned}$$

ALTERNATIVE 1: Construct a tie next year and defer the new circuit 2 years.

$$\text{Inflation Factor} = (1.05)^2 = 1.1025$$

$$\text{Construct tie PWARR} = (75k)(0.167)(8.2217) = \$102,976$$

$$\begin{aligned} \text{Construct circuit 2 yrs later PWARR} &= (1.1025)(.8029)(450k)(0.167)(8.2217) \\ &= \$546,929 \end{aligned}$$

$$\text{Total Cost } \$649,905$$

ALTERNATIVE 2:

$$\text{Construct circuit next year PWARR} = (450k)(0.167)(8.2217) = \$617,861$$

Conclusion Alternative 2 is approximately 5% less expensive and it should be selected unless there are sufficient unassigned benefits to favor alternative 1.

|        |                                                                                                               |                    |                       |
|--------|---------------------------------------------------------------------------------------------------------------|--------------------|-----------------------|
|        |  Indicates Latest Revision | Completely Revised | New Page              |
| 6242.2 | SDG&E DISTRIBUTION DESIGN MANUAL                                                                              |                    | REVISION              |
|        | PWARR ANALYSIS                                                                                                |                    | DATE 1-1-89           |
|        |                                                                                                               |                    | APPD CVN / <i>LDJ</i> |

### Example 2

Consider advancing the construction of a new circuit 2 years to achieve an annual reliability benefit of \$100,000. The circuit cost is the same as in Example 1. Is this cost effective?

$$\text{Construct line next year} - (450k)(0.167)(8.2217) = \$617,861$$

$$\text{Construct line 2 yrs later} - (1.1025)(0.8029)(450k)(0.167)(8.2217) = \$546,929$$

$$\text{PWARR of advancement} = 617,861 - 546,929 = \$70,932$$

$$\text{C/B ratio} = (70,929)(A/P_2)/100,000 = 0.4175$$

Conclusion: It is cost effective to move the project ahead 2 years.

### Example 3

Consider the effect of adding O&M expenditures to the construction in Example 1. O&M associated with constructing the new line is \$75k, \$15k for constructing the tie.

#### ALTERNATIVE 1:

$$\text{Construct tie line next year} \quad \text{PWARR} = \$102,976 + \$15,000 = \$117,976$$

$$\text{Construct ckt 2 yrs later} \quad \text{PWARR} = \$546,929 = (75k)(1.1025)(.0829) = \$613,319$$

$$\text{Total cost} = \$731,295$$

#### ALTERNATIVE 2:

$$\text{Construct new circuit next year} \quad \text{PWARR} = \$617,861 + \$75,000 = \$692,861$$

Conclusion: Alternative 2 is still approximately 5% less expensive and should be selected unless there are sufficient unassigned benefits to favor alternative 1.

|          |                                                                                         |                                                                                                               |                    |          |
|----------|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|--------------------|----------|
|          |                                                                                         |  Indicates Latest Revision | Completely Revised | New Page |
| REVISION |                                                                                         | SDG&E DISTRIBUTION DESIGN MANUAL                                                                              |                    |          |
| DATE     | 1-1-89                                                                                  | PWARR ANALYSIS                                                                                                |                    |          |
| APPD     | CVN  |                                                                                                               |                    |          |
|          |                                                                                         | 6242.3                                                                                                        |                    |          |



**6300**  
**SUBSTATION**  
**ENGINEERING**

**6300**  
**SUBSTATION**  
**ENGINEERING**

6300 - No FMO standards for this section.

